

MANUFACTURED IN:



TECHNICAL MANUAL

ISOFIRE WALL FG VF Range

ISOFIRE WALL FG VF | ISOFIRE WALL FG VF FONO



PART OF
MANNI
GROUP



ISOPAN

INSULATING DESIGN


TABLE OF CONTENTS

ISOFIRE WALL FG VF Range.....	4
<i>Types of panels.....</i>	<i>4</i>
<i>Geometric features.....</i>	<i>4</i>
<i>Metal facings</i>	<i>4</i>
<i>Protection of the pre-painted faces</i>	<i>5</i>
<i>Features of the internal faces.....</i>	<i>5</i>
<i>Insulation.....</i>	<i>5</i>
<i>Panel weight.....</i>	<i>5</i>
<i>Static features</i>	<i>6</i>
<i>Joint</i>	<i>8</i>
<i>Tolerances (annex D EN 14509)</i>	<i>8</i>
<i>Reaction to fire (EN 13501-1).....</i>	<i>9</i>
<i>Restrictions of use</i>	<i>9</i>
<i>General design instructions.....</i>	<i>10</i>
<i>Thermal expansions.....</i>	<i>10</i>
<i>Fastening instructions</i>	<i>12</i>
<i>Assembly instructions</i>	<i>14</i>
<i>Package composition</i>	<i>15</i>
<i>Transport and storage.....</i>	<i>15</i>
<i>Packaging.....</i>	<i>16</i>
<i>Durability</i>	<i>16</i>
<i>Maintenance.....</i>	<i>17</i>
<i>Safety and disposal.....</i>	<i>17</i>
Annex A.....	18
Annex B.....	21
<i>Building details</i>	<i>21</i>

ISOFIRE WALL FG VF Range


TYPES OF PANELS

ISOFIRE WALL



Double skin sandwich panel for walls with compact glass wool insulating core that assures the product's incombustibility in addition to assuring adequate thermal insulation. It was developed to meet growing performance needs and legislative constraints on fire behaviour for buildings, keeping high mechanical and insulation characteristics. Used for wall cladding of industrial and residential buildings.

ISOFIRE WALL Fono



Double skin sandwich panel for walls with compact glass wool insulating core that assures adequate thermal insulation. Solution with internal face in micro-perforated sheet able to increase the panel's sound absorption performance.

GEOMETRIC FEATURES

	ISOFIRE WALL FG VF	ISOFIRE WALL FG VF Fono
Length	Up to maximum transportable	
Useful Pitch (mm)	1000-1150	
Insulating Thickness (mm)	50, 60, 80, 100, 120, 150, 170, 200	50, 60, 80, 100, 120, 150
External face	Micro-ridged lightly profiled metal sheet	
Internal face	Micro-ridged lightly profiled metal sheet	perforated metal sheet (diameter 3 mm, pitch 5 mm) micro-ridged

METAL FACINGS

- SENDZIMIR system hot dip galvanised steel by continuous process (UNI EN 10346) and pre-painted by means of a coil coating continuous process with different painting cycles based on end use (see: "Guide to Choosing Pre-painted").
- 3000 or 5000 series aluminium alloys with pre-painted finish with the cycles mentioned in the previous point, with a natural or embossed effect.
- Stainless steel AISI 304, 2B finish, according to EN 10088-1.
- In case of aluminium facings, these must be preferably applied on both sides: in fact, if different materials are used on the two sides, the panel may distort and bend due to the different thermal expansion coefficients of the faces.
- For stainless steel facings, one should take into account the possible appearance of flaws that are highlighted by such reflecting surfaces.

PROTECTION OF THE PRE-PAINTED FACES

All pre-painted metal facings are supplied with an adhesive polyethylene protective film that prevents damage to the paint layer. If the material is specifically requested without protective film, Isopan assumes no liability in case of damages to the paint. The protective film that covers the pre-painted panels must be completely removed during assembly and, in any case, within sixty days after the material preparation.

It is also recommended not to expose the panels covered by a protective film to direct sunlight.

FEATURES OF THE INTERNAL FACES

Perforated metal sheet (ISOFIRE WALL FG VF Fono)

A layer of dustproof black glass fibres is placed between the perforated internal face and insulating core package to protect the inner side.

INSULATION

Made with compact glass wool with oriented fibres, having the following physical and mechanical features:

- Incombustibility Class A1 according to standard EN 13501
- Average density $55 \text{ kg/m}^3 \pm 10\%$
- Melting temperature $> 1000 \text{ }^\circ\text{C}$
- Absence of fumes during insulating material combustion
- Water vapor diffusion resistance MU1 ($\mu = 1$)
- Short-term water absorption WS ($W_p < 1 \text{ kg/m}^2$)
- Specific thermal capacity $c_p = 1030 \text{ J/kgK}$
- Durability: class DUR2 according to standard EN 14509
- Thermal conductivity coefficient $\lambda = 0.039 \text{ W/mK}$
- Compressive strength $\geq 0.06 \text{ MPa}$ (at 10% of deformation)

Thermal transmittance coefficient U^*

Panel thickness (mm)	50	60	80	100	120	150	170	200
U [W/m²K]	0.75	0.63	0.49	0.39	0.33	0.27	0.24	0.20

* Mandatory for CE marking of double skin metal faced sandwich panels according to EN 14509.

Thermal resistance coefficient R

Panel thickness (mm)	50	60	80	100	120	150	170	200
R [m²K/W]	1,27	1,54	2,08	2,63	3,13	3,85	4,35	5,26

PANEL WEIGHT

Isofire Wall FG VF

Sheet thickness (mm)		Nominal panel thickness (mm)							
		50	60	80	100	120	150	170	200
0,5/0,5	kg/m ²	10,9	11,4	12,5	13,6	14,7	16,4	17,5	19,2
0,6/0,6	kg/m ²	12,6	13,1	14,2	15,3	16,4	18,1	19,2	20,9

Isofire Wall FG VF Fono

Sheet thickness (mm)		Nominal panel thickness (mm)					
		50	60	80	100	120	150
0,5/0,5	kg/m ²	9,4	9,9	11,0	12,1	13,2	14,8
0,6/0,6	kg/m ²	11,1	11,7	12,8	13,9	15,0	16,6

STATIC FEATURES

The resistance values refer to a panel assembled horizontally and subject to the action of a distributed load that simulates the action of wind pressure; the calculation method used by ISOPAN does not consider the thermal effects, which are verified by the designer. Depending on the weather conditions of the installation location and the colour of the external face, if the designer feels a detailed verification of the stresses caused by thermal actions and long-term effects is necessary, he/she should contact the ISOPAN Technical Office. The designer is still responsible for checking the fastening systems, based on their number and the way they are placed.


ISOFIRE WALLFG VF

ISOFIRE WALL panels are self-supporting according to the **UNI EN 14509** definition. "...panel capable of supporting, by virtue of its materials and shape, its own weight and in case of panel fastened to spaced structural supports, all applied loads (snow, wind, air pressure), and transmitting these loads to the supports.", depending on the type of metal supports, their thickness and the thickness of the thermal insulating core.

Below are some examples of indicative load bearing tables:

The indications included in the following tables doesn't take into account the thermal load effects. Furthermore, the indicative values reported may not be used to replace the project calculations drawn up by a qualified technician, who will have to validate these instructions in accordance with the laws in the country of installation of the panels.

- panel on multiple supports:



STEEL SHEETS 0.6/0.6 mm - Multi-Support 120 mm						
UNIFORMLY DISTRIBUTED LOAD [kg/m ²]	NOMINAL PANEL THICKNESS mm					
	50	60	80	100	120	150
MAXIMUM SPAN cm						
60	335	395	460	510	555	605
80	280	325	395	435	470	510
100	240	280	350	385	410	445
140	185	225	290	315	340	365
180	160	180	240	270	295	315
200	145	170	225	260	270	295


ISOFIRE WALL FG VF Fono

ISOFIRE WALL FONO panels are self-supporting according to the **UNI EN 14509** definition. "...panel capable of supporting, by virtue of its materials and shape, its own weight and in case of panel fastened to spaced structural supports, all applied loads (snow, wind, air pressure), and transmitting these loads to the supports.", depending on the type of metal supports, their thickness and the thickness of the thermal insulating core.

Below are some examples of indicative load bearing tables:


The indications included in the following tables doesn't take into account the thermal load effects. Furthermore, the indicative values reported may not be used to replace the project calculations drawn up by a qualified technician, who will have to validate these instructions in accordance with the laws in the country of installation of the panels.

- panel on two supports:



STEEL SHEETS 0.6 / 0.6 mm - Simple support 120 mm						
UNIFORMLY DISTRIBUTED LOAD [kg/m ²]	NOMINAL PANEL THICKNESS mm					
	50	60	80	100	120	150
	MAXIMUM SPAN cm					
60	250	285	360	410	450	500
80	215	245	310	355	390	440
100	185	215	270	285	340	385
140	150	180	245	270	295	330
180	135	145	190	230	260	290
200	125	140	180	215	250	275

- panel on multiple supports:




STEEL SHEETS 0.6 / 0.6 mm - Multi-Support 120 mm						
UNIFORMLY DISTRIBUTED LOAD [kg/m ²]	NOMINAL PANEL THICKNESS mm					
	50	60	80	100	120	150
	MAXIMUM SPAN cm					
60	340	425	490	530	595	510
80	290	365	420	460	520	430
100	255	325	340	405	455	375
140	210	290	315	350	395	310
180	175	225	270	310	345	270
200	170	210	255	295	330	250


JOINT

The shape of the labyrinth joint is expressly designed to assure product functionality, even at very low temperatures.

For special end-use requirements, an optional gasket can be put in on site to increase the airtightness of the joint.

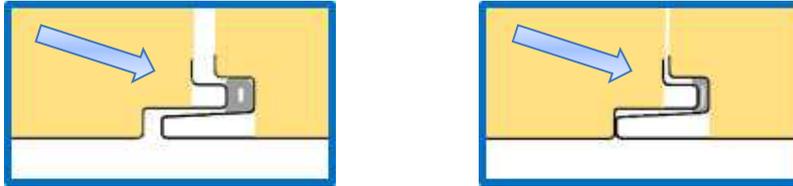

Gasket crushing, leading to increased seal, due to the side pressure required to assure suitable coupling.

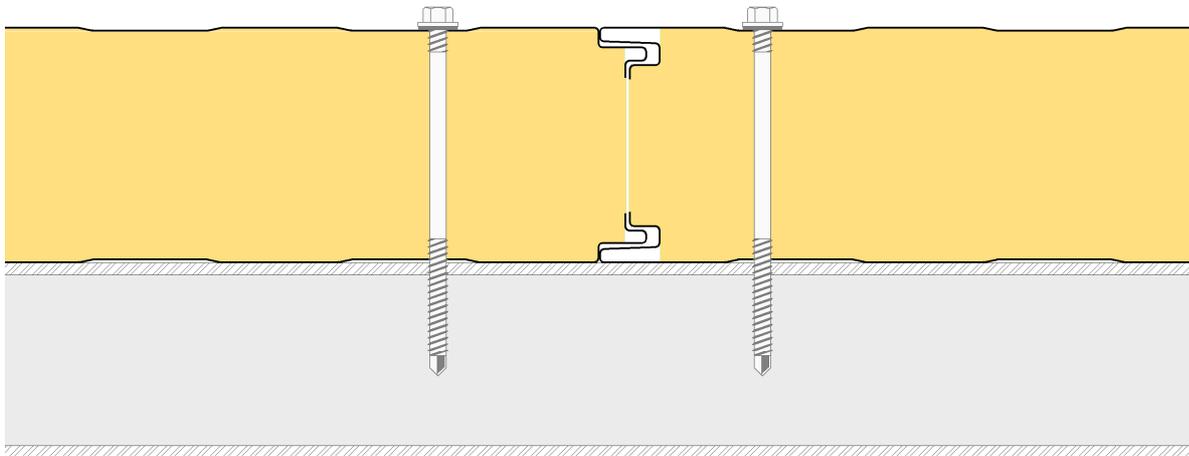

TOLERANCES (ANNEX D EN 14509)

- Facing thickness: according to the reference standards for the products used
- Panel thickness: nominal, ± 2 mm
- Length: if ≤ 3000 mm ± 5 mm; if > 3000 mm ± 10 mm

REACTION TO FIRE (EN 13501-1)

The reaction to fire indicates the degree to which a material participates in the fire to which it is subjected.

The European reference standards to classify the reaction to fire of construction material is **EN 13501-1** (Fire classification of construction products and building elements). This standard specifies:

Euroclasses: the standard distinguishes seven classes, with increasing contribution to fire, from A1 (non-combustible product) to F (product not tested/not classified).

Smoke: smoke opacity growth speed

- **s1** no smoke emission
- **s2** low smoke emission
- **s3** strong smoke emission

Burning droplets: fall of burning particles

- **d0** no burning particles
- **d1** few burning particles
- **d2** many burning droplets

The ISOFIRE WALL FG VF panel, in compact glass wool has been tested for fire reaction in accordance to standard **EN 13501-1** obtaining the classification: **A2 S1 D0**. For further information, please refer to the Isopan catalogue, the website www.isopan.com or contact the Technical Department.

RESTRICTIONS OF USE

- A thermohygroscopic check should be performed during the design stage. In certain conditions (e.g. high indoor humidity level) condensation can appear on the internal face of the panel with consequent dripping inside the building. If these conditions persist long enough, they can accelerate the natural degradation of the organic facing and the face itself.
- **Due to solar radiation, the external face of the panel can reach relatively high temperatures. In some cases, it can reach a temperature of 80+90°C.** A high temperature gradient should cause the panel deflection the panel and wrinkle the metal sheet. Isopan recommends a minimum thickness of 0.6 mm for the external side face. The occurrence of the problem may be limited with appropriate design, taking into account environmental conditions, length, colour of the panels and thickness of the sheet metal. **(See the "Thermal expansion" section).**
- If an aluminium sheet is used as an external face, it is necessary to consider the possible distortions of the panel (bending) due to the different thermal expansion coefficients.
- The perforated face in pre-painted galvanised steel has no protection in the area of the hole, as it is produced by punching. The exposed perforated panel side should be used towards the inside of the building in order to prevent corrosion phenomena.

GENERAL DESIGN INSTRUCTIONS

The wall panels generally require, during the design phase, a structure able to absorb the external loading stress that will not submit the panels to excessive and permanent distortions to the detriment of their basic characteristics. When choosing the panel types during the design phase, you should consider some parameters related to environmental actions like:

- **Wind action:** depends on the climatic area where the building is installed; the values fluctuate based on wind speed, with subsequent greater or lesser load pressure on the exposed surfaces (affects the type and number of panel fastening elements). For this particular panel (with concealed fastening elements), wind action in depression should be considered, bearing on joint resistance and fastening points, and it is required to use the specific Isopan plate on each screw to distribute stress (we recommend consulting with the ISOPAN Technical Department).
- **Thermal stress:** largely depends on the colour of the external surface of the panel and the building exposure, and can induce significant system deformations.
- **Atmospheric corrosion:** depends on the environment where the panels are installed (marine, industrial, urban, rural); mainly affects the degree of corrosiveness on the panel surfaces. In this regard, suitable metallic or organic facings should be chosen (refer to the available documentation or contact the Isopan Technical Department).

In order to make up for possible lack of material due to damages during handling and assembly, Isopan recommends procuring spare panels (quantity equal to approximately 5% of the total).

THERMAL EXPANSIONS

All the materials used to build the walls, especially metals, are subject to **thermal expansion and contraction** phenomena, due to temperature changes. The stresses due to metal sheet thermal expansions act on the siding and can cause functional and structural product anomalies, particularly in case of:

- Significant panel length ($L > 5000$ mm);
- Solar radiation;
- Medium and dark colours;
- High panel thickness;
- Inadequate thickness of the metal support.

Material	Thermal expansion coefficient ($^{\circ}\text{C}^{-1}$)
Aluminium	23.6×10^{-6}
Steel	12.0×10^{-6}
Stainless steel AISI 304	17.0×10^{-6}

-Linear thermal expansion coefficient values-


Type of facing		Surface temperature ($^{\circ}\text{C}$)	
		Min.	Max.
Insulated	Light	-20	+60
	Dark	-20	+80

Where "insulated" means that an insulating core is inserted between the external sheet and the structure; "light or dark" means the surface colour of the sheet.

-Temperature range-

For high surface temperatures, the linear extension of the metal support must be absorbed by the system; cyclic temperature changes related to the day-night or freeze-thaw fluctuations create uncontrollable cyclic stresses that fatigue the support elements. These stresses may cause flaws and undulations in wall panels and, in more severe cases, even wrinkling phenomena. These issues may be overcome by complying with the requirements:

- Calculate in advance the deformation induced on the panel by the thermal expansion
- Do not use dark colours on long panels
- Use suitable thickness of the metal supports (minimum 0.6 mm to be assessed based on the design specifics)
- Segment the panels
- Use a panel fastening system able to offset the shift caused by the excessive thermal expansions; this solution is particularly important when using panels with aluminium face (see for example figure below).

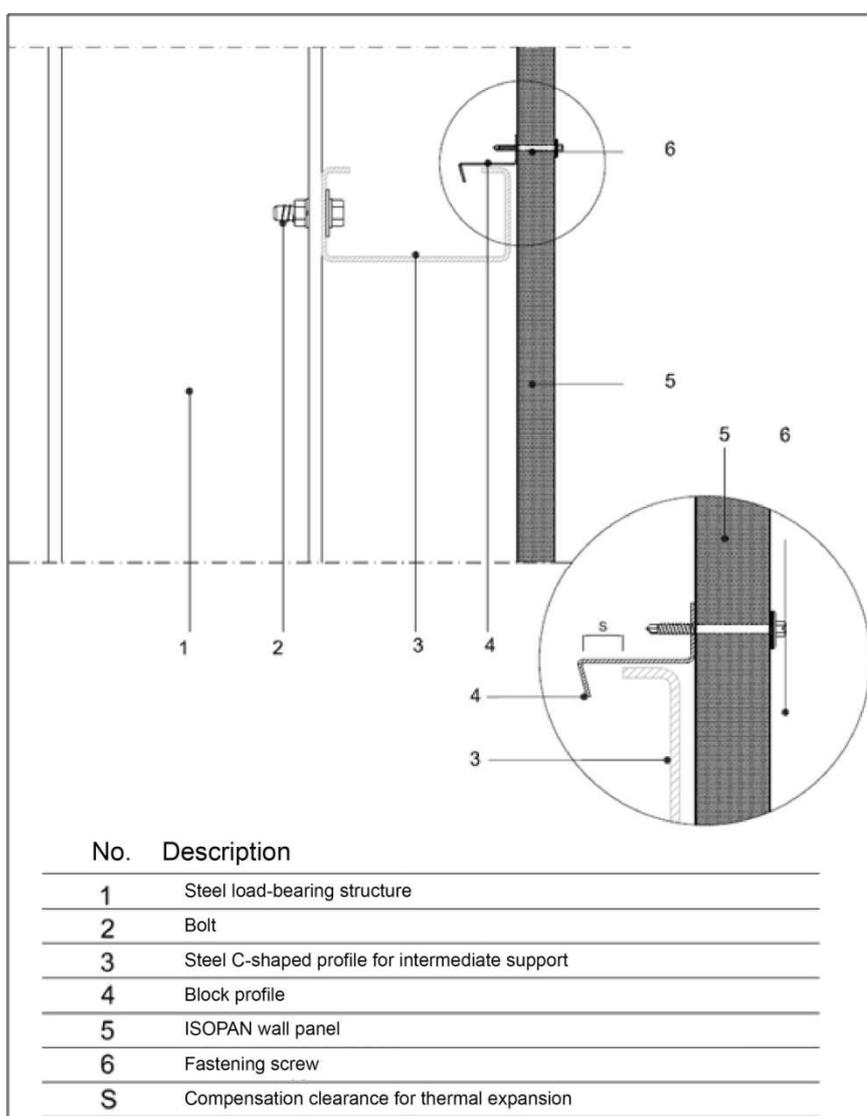


FASTENING INSTRUCTIONS

The purpose of the fastening elements is to efficiently anchor the panel to the load-bearing structure; the type of fastening unit depends on the type of face. The number and position of the fastening elements must guarantee resistance to the stresses induced by dynamic loads, which can also exist in depression.

Appropriately coated carbon steels or austenitic type stainless steels must be chosen as suitable materials to fasten panels. Pay particular attention to the compatibility of the steel and aluminium materials in order to prevent the formation of galvanic currents.



Wall panel fastening

The panels are usually anchored to metal sheets positioned transversally to the length of the panels, which are, in turn, appropriately fastened to the load-bearing structure of the building as required by the design for stability. The width of the support must be at least 50 mm; said width must be checked and, if necessary, increased based on design requirements. In the event of head junction between two panels, said width must be at least 120 mm. Panels must be fastened to the load-bearing structure using the devices identified and sized in the design. The number of fastening elements varies depending on the different climatic conditions where the building is situated. Normally, for each panel, a fastening unit must be used at each support sheet. With high spans between supports and/or in areas that are particularly exposed to wind action, the density of the fastening elements must be established by the designer on a case by case basis, appropriately increasing the number.

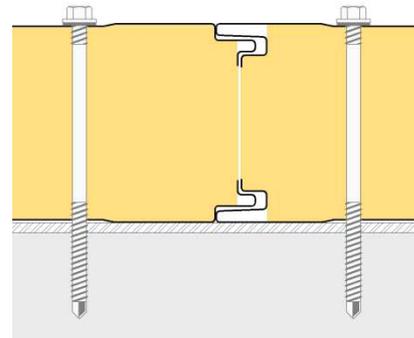


Fastening methods

Fastening varies depending on the project to be implemented and site application system of the panels. Isopan recommends using double-threaded screws with washer and sealing gasket with 19 mm minimum diameter. In order to prevent the making of galvanic current between screw and glass wool, Isopan recommends to use stainless steel screws.

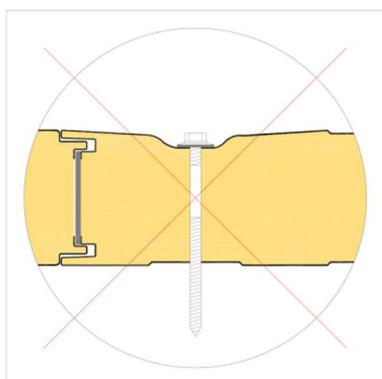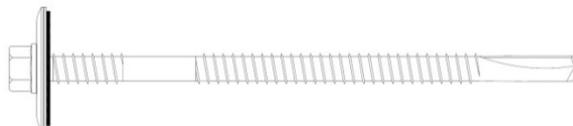


A

Incorrect tightening due to high torque applied to the screw with marked deformations of the sheet. **In this situation the optimal closing of the interlocking is no longer guaranteed, therefore, the aesthetic functionality of the product remains compromised.**

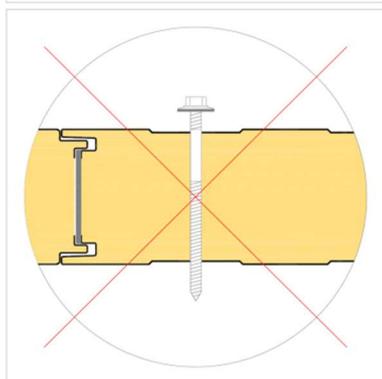

B

Incorrect tightening due to the torque applied to the screw being insufficient to ensure correct fastening of the panel to the structure.

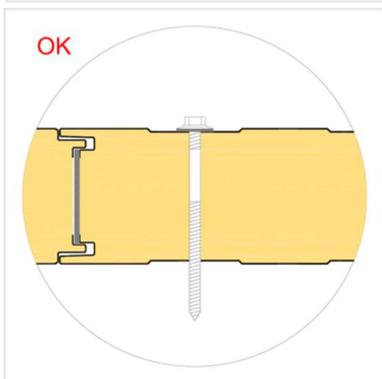

C

Correct tightening obtained by applying sufficient torque to the screw to ensure fastening of the panel to the structure.


Screw length

The correct length of the screw depends on the panel thickness and on the type of support (steel, wood).

L = Length of screw
S = Thickness of screw

Fastening on steel
 $L = S + 30 \text{ mm}$

Fastening on wood
 $L = S + 40 \text{ mm}$

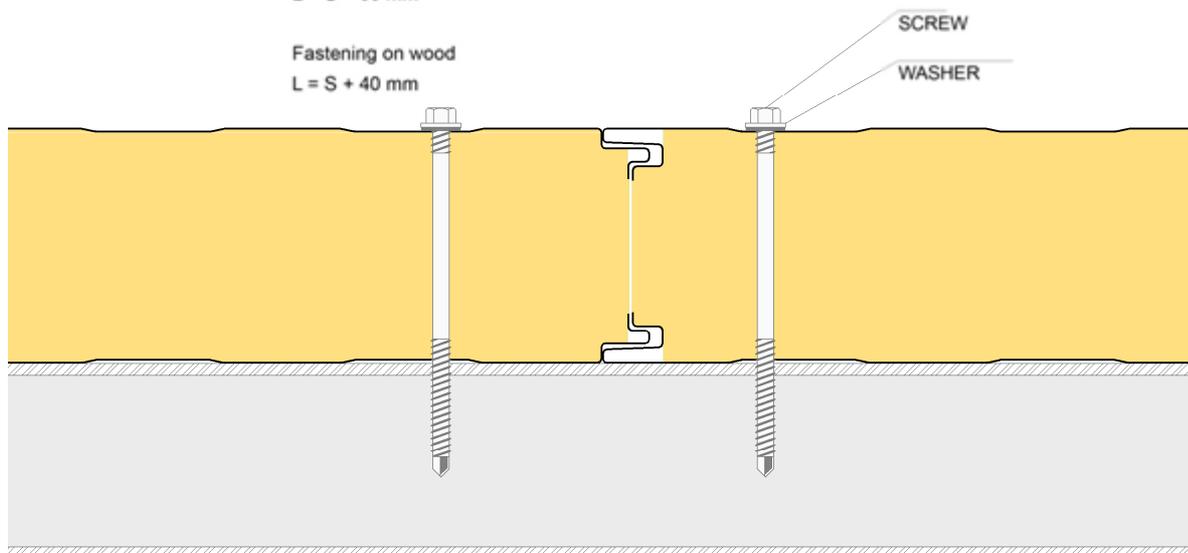

ASSEMBLY INSTRUCTIONS

The correct sequence of assembly operations is the following:

Preliminary operations

- Verify that the supports are properly aligned.
- Pay particular attention to the contact points between the supports and the panel support plates to avoid phenomena linked to electrochemical corrosion if incompatible metals are coupled. For this purpose, elastomer or expanded resin strips may be applied as separators.
- Ensure that the site area has appropriate storage and handling capacity in order to prevent material damage.
- Use suitable tools (toothed circular saw, jigsaw, shears, nibbler) for on-site cutting operations. The use of equipment that produces metallic sparks (e.g. abrasive discs, disc cutter) is absolutely not recommended.
- Use suitable handling systems, particularly for long or heavy panels, in order to prevent safety risks on site and damages to the product.

Using acetic silicones is prohibited as they tend to attack the pre-painted galvanised face and form incipient oxidation. It is best to use single component sealant silicones with neutral curing that tend to harden due to the air humidity and, being free of solvents, do not attack the paint.

Assembly

- Apply the basic tinwork (when provided) to the foot of the wall, as well as the tinwork that must be installed before the wall, such as drip edges, roof fittings, etc.
- Remove the protective film from the panels, if any.
- Apply the panels starting from the bottom of the wall, or the side end in case of vertical assembly, taking care to join them properly and to ensure they are plumb.*
- Systematically fasten the elements after ensuring they match correctly. The fastening screw must be inserted orthogonally to the panel.
- If the wall height involves the need to assemble panels vertically, the junction is made at the frame and requires appropriate use of shaped fitting tinwork (ridge caps, drip edges, etc.).
- Use "U"-shaped ridge caps and drip edges for doors and window frames.
- Apply the finishing elements (angle bars, perimeter edgings, fittings).
- Check and clean the walls, with particular attention to metal scraps, fastenings and fittings with door and window frames.
- For horizontal installation, the groove part of the panel must always be facing downward in order to prevent rainwater from stagnating and to promote normal run-off.

***Note: it is mandatory to adhere to the correct installation direction of the panels during assembly**

PACKAGE COMPOSITION

The panels are normally supplied packaged and wrapped with extensible polyethylene film; the standard composition of the package is as shown below:

Panel thickness (mm)	50	60	80	100	120	150	170	200
No. of panels per package	15	12	9	7	6	5	4	3

Package compositions and types of packaging other than standard must be explicitly requested when ordering.

TRANSPORT AND STORAGE

Lorry loading

- The packages of panels are loaded on lorries, usually two in width and three in height. The packages include polystyrene spacers at the base, which are thick enough to allow for the lifting straps.
- The goods are arranged on the vehicles so as to ensure safe transportation and integrity of the material, in accordance with the requirements of the carrier, who is solely responsible for load integrity. Pay special attention to ensure the weight bearing on the bottom package, as well as the pressure exerted in the tying points, do not cause damage and the straps do not distort the shape of the product in any way.
- Isopan assumes no liability for loading lorries that are already partially occupied by other materials, or that do not have a suitable loading floor.

Customers who will pick up the material must instruct the drivers accordingly.

Lorry unloading with crane

- Use any type of crane equipped with spreader beam and equipped straps. Isopan can advise customers on the choice of spreader beams and straps. By using correct lifting systems, the panels will not be damaged.
- Never use chains or metal cables for lifting under any circumstances. As a general rule, sling the packages leaving about 1/4 of their length protruding from each end.

Lorry unloading with forklifts

- If the lorries are unloaded using a forklift, the length of the packages and their possible bending should be taken into account in order to prevent damages to the bottom of the package.
- The forks must be wide and long enough in order not to damage the product. When possible, protective material against surface abrasion and scratches should be applied between the fork and the package.

Indoor storage (Annex A)

- The materials must be stored in ventilated indoor facilities that are free of dust and humidity and not subject to temperature changes.
- Moisture that can penetrate (rain) or form (condensation) between two panels can damage the facings since it is particularly aggressive on metals and facings, with subsequent oxidation.
- Pre-painted facings may be more exposed to the negative consequences of combined heat/humidity conditions.

Outdoor storage (Annex A)

- If the packages and accessories are stored outdoors, the surface must absolutely be inclined longitudinally to prevent moisture from accumulating and to allow water run-off and natural air circulation.
- If storage is not shortly followed by pick-up for installation, it is advisable to cover the packages with a protective tarp, assuring impermeability as well as adequate ventilation to prevent condensate from accumulating and puddles of water from forming.

Storage terms (Annex A)

- Based on experience, in order to maintain original product performance, continuous indoor storage in closed and ventilated facilities should not exceed six months, while outdoor storage should never exceed sixty days from the date of production. These terms refer to the properly stored product, as instructed in the "storage" chapter in Annex A. However, the materials must always be protected against direct sunlight, as it may cause alterations.
- In case of transport in containers, the products must be removed from the containers as soon as possible and, however, no later than 15 days from the loading date, to prevent deterioration of the metal supports and organic coatings (e.g. blistering). Moisture inside the container must absolutely be avoided. Upon customer request, Isopan can provide special packages that are more suitable for transport in containers.

PACKAGING

Isopan suggests carefully choosing the type of packaging depending on destination, type of transport, conditions and length of storage.

To choose the correct type of packaging, please refer to the "**Packaging and Services**" document on www.isopan.com.

DURABILITY

Product durability depends on the intrinsic features of the panel used in relation with its final use. The panel, including the features of the metal supports, must be chosen after the wall has been properly designed.

In this regard we recommend, if necessary, using the Isopan documentation, also available on the web (www.isopan.com), and/or the reference standards.

MAINTENANCE

All types of facings, including those made with metal sandwich panels, require maintenance.

The type and frequency of maintenance activities depend on the product used for the external facing (steel, aluminium); in any case, we recommend periodically inspecting the building (at least once a year), in order to assess its conditions.

In order to maintain the aesthetic and physical properties of the elements and to extend the efficiency of the protective facing, it is also recommended to regularly clean the walls, paying special attention to the areas that could facilitate rain water stagnation, where substances that are harmful to the durability of the metal support may be concentrated.

If you notice any problems following an on-site inspection, you must react immediately in order to restore the initial general conditions (e.g. restoring the paint where there are local abrasions or scratches).

Upon customer request, Isopan can provide useful information to solve some problems related to this topic.

SAFETY AND DISPOSAL

Pursuant to Directive 68/548/EEC the sandwich panel does not require labelling. To meet customer requirements, Isopan has drawn-up a "Technical details for safety" document, to be referenced for any kind of information related to safety.

Caution: all information contained in the product data sheets must be validated by a qualified technician according to the laws in force in the country where the panels are installed.

Technical specifications and features are not binding. Isopan reserves the right to make changes without prior notice; the latest documentation is available on our website www.Isopan.it. For whatever is not explicitly specified herein, please refer to the "General conditions of sale of the corrugated metal sheets, insulated metal panels and accessories". All the products that fall under the EN 14509 standard field of application are CE marked.

This document and all the elements it contains are the exclusive property of Isopan. Reproduction, even in part, of the texts and any images contained herein without the author's written authorisation is forbidden.

Copyright © 2015 – ISOPAN S.p.A.

Annex A

LORRY UNLOADING WITH CRANE

For lifting, the packages must always be sling in at least two points. The distance between them must be no less than half the length of the packages.

Lifting should be possibly carried out using synthetic fibre straps (Nylon) no thinner than 10 cm, so that the load is distributed on the strap and does not cause distortion. (see Figure 1)

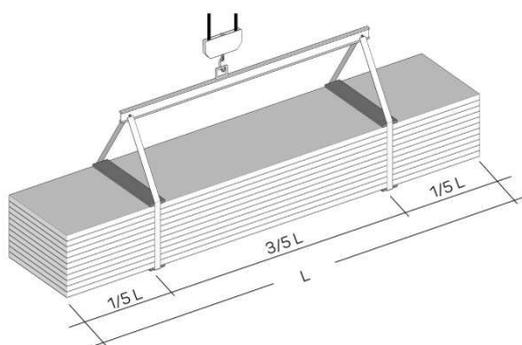


Figure 1

Suitable spacers must be placed under and above the package, made of sturdy solid wood or plastic elements to prevent the strap from coming into direct contact with the package. These spacers must be at least 4 cm longer than the width of the package and be at least as wide as the strap. Make sure that the straps and supports cannot move during lifting and that manoeuvres are performed cautiously.

LORRY UNLOADING WITH FORKLIFTS

If the lorries are unloaded with a forklift, take into account the length of the packages and their possible bending in order to avoid damaging the bottom of the package and/or to the extreme failure limit of the panels.

We recommend using forklifts that are suitable for handling panels and similar products.

STORAGE

The packages must always be kept off the ground both in the warehouse and, more so, at the construction site. They must have plastic foam supports with flat surfaces longer than the width of the panels and at a distance adequate to the features of the product.

The packages should preferably be stored in dry facilities to prevent stagnation of condensation water on inner, less ventilated elements, which is particularly aggressive on metals, resulting in the formation of oxidation.

The panels must be stored in dry ventilated facilities; should this not be possible, open the packages and ventilate the panels (spacing them from each other). If the panels remain packaged outdoors, the galvanised facing may oxidise (white rust) even after a few days, due to electrolytic corrosion.

The panels must be stored to facilitate water run-off, especially when it is necessary to temporarily store them outside (see Figure 2).

If storage is not shortly followed by pick-up for installation, it is advisable to cover the packages with protective tarps.

To maintain original product performance, continuous indoor storage in ventilated facilities should not exceed 6 months, while outdoor storage should never exceed 60 days.

Packages stored at a height must always be properly bound to the structure.

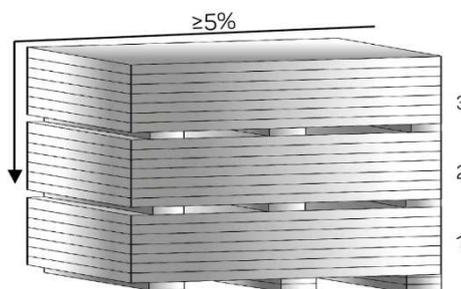


Figure 2

PRE-PAINTED FACES



In case of prolonged storage, the pre-painted products must be stored indoors or under a canopy. There is the risk that stagnant humidity may attack the paint layer, causing it to detach from the galvanised face. It is not advisable to wait for more than two weeks from when the products were stored at the site.

In case of container transport, the products must be removed from the container within 15 days from the loading date in order to prevent the metal supports from deteriorating.

PANEL HANDLING

The panels must be handled using adequate protection equipment (accident-prevention shoes, gloves, overalls, etc.) in compliance with current regulations.

The individual element must always be manually handled by lifting the element without dragging it on the ground and turning it sideways beside the package; it must be transported by at least two people according to the length, keeping the element on its side. (see Figure 3)

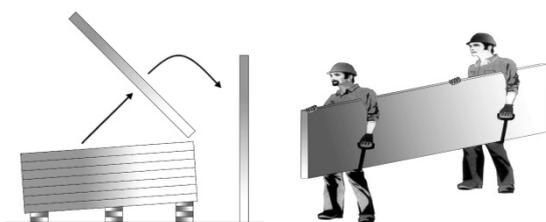


Figure 3

Handling equipment as well as gloves must be clean and such not to damage the items.

INSTALLATION

Panel installation personnel must be qualified and know the correct technique to perform the work in a workmanlike manner.

If required, the seller can provide appropriate guidance and instructions.

Installation personnel must be equipped with footwear with soles that do not damage the external facing of the panel.

On-site cutting operations must be done with suitable tools (jigsaw, shears, nibbler, etc.).

We do not recommend using tools with abrasive discs.

To fasten the panels, it is advisable to use devices that can be provided by the seller.

Tighten the screws using a screwdriver with torque limitation.

For roofs with pitch elements without intermediate joints (overlaps), the slope is usually no less than 7%. For smaller slopes, adopt the seller's provisions.

In case of head overlaps, the slope should take into account the type of joint and material used, as well as the specific environmental conditions.



During panel assembly and, in particular, in roofs, it is necessary to immediately remove all residual materials paying special attention to metal ones that may cause early deterioration of the metal supports by oxidising.

PROTECTIVE FILM

The pre-painted metal facings are supplied upon request with adhesive polyethylene protective film that prevents damage to the paint layer.

The protective film covering the pre-painted panels must be completely removed during assembly or, in any case, within 60 days from material preparation.

It is also recommended not to expose the panels covered by a protective film to direct sunlight.



Maximum 2 months

For panels expressly requested without protective film, special care is required during on-site handling and installation.

MAINTENANCE

The main routine maintenance operation is cleaning the panels. Panel surfaces that, following visual inspection, are found to be dirty or oxidised can be washed with soap and water using a soft brush. Cleaning water pressure can be applied up to 50 bar, but the jet must not be too close or perpendicular to the surfaces. Near the joints the water must be sprayed at a sufficient angle not to undermine their tightness.

YEARLY CHECKS OF THE ISOPAN PANELS

WHAT TO INSPECT	CORRECTIVE ACTIONS
Conditions of the pre-painted surfaces (cracks and colour unevenness)	Assess the condition of the surfaces Repaint where possible
Scratches and dents	Repaint and repair dents
Fastening screws	Remove a screw and check if oxidised Tighten the screws where necessary
Angular cut-edge parts	Check the state of oxidation Clean and repaint

These provisions are taken from the General Conditions of Sale.

Annex B

BUILDING DETAILS

RAO 01 - Recessed wall corner connection

RAO 05 - Wall corner connection

RPCV 01 - Roof wall connection with insulated gutter

RPCV 03 - Roof wall connection with gutter

RPCV 04 - Roof wall connection

RPCV 13 - Flat roof wall connection

RPCV 14 - Roof wall connection with insulated gutter

SPO 13 - Horizontal butt joint


SPO 15 - Horizontal butt joint (for thermal expansion)

SPV 17 - Vertical butt joint


SPV 18 - Wall panel fastening in the event of thermal expansion

SPV 19 - Concrete base kerb wall panel connection

WALL CORNER CONNECTION – RECESSED

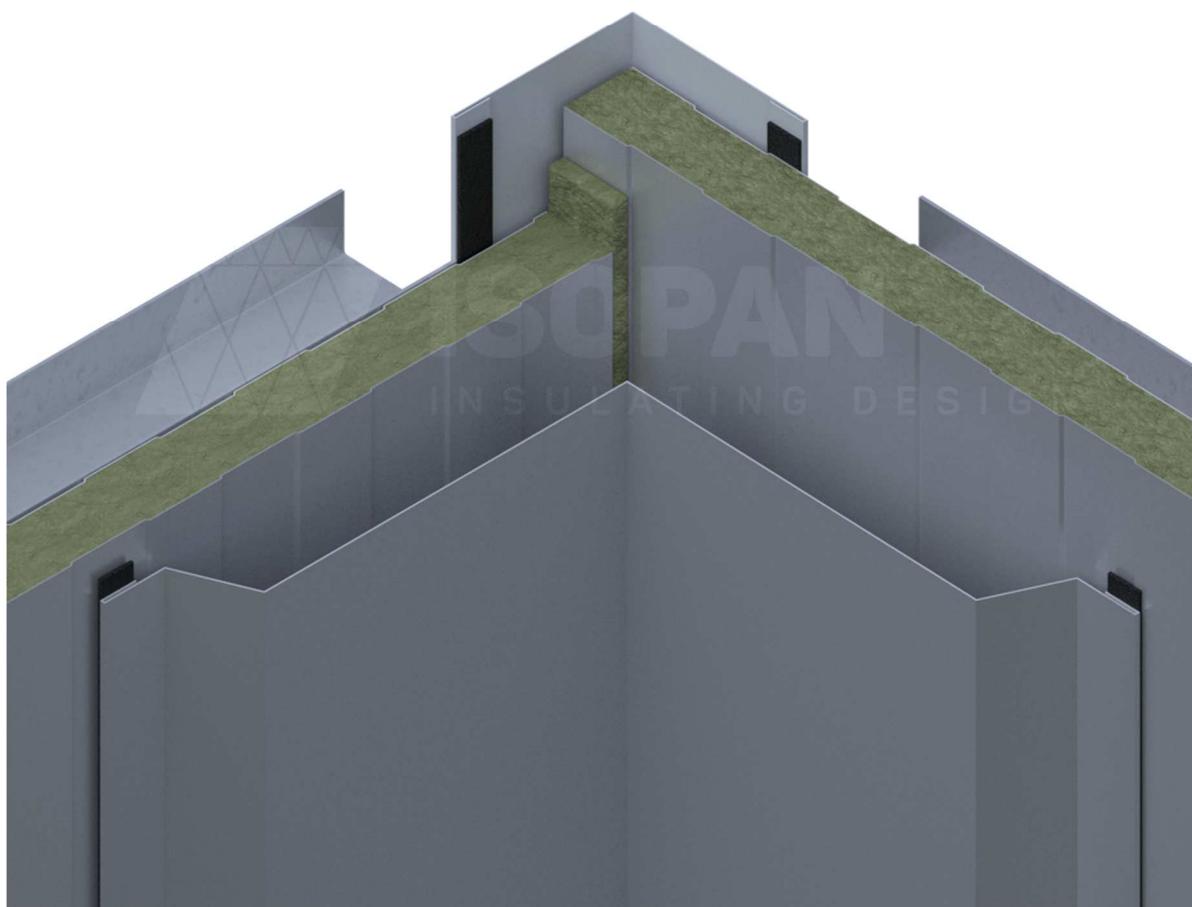

Type 1 wall angular connection: horizontal cross-section

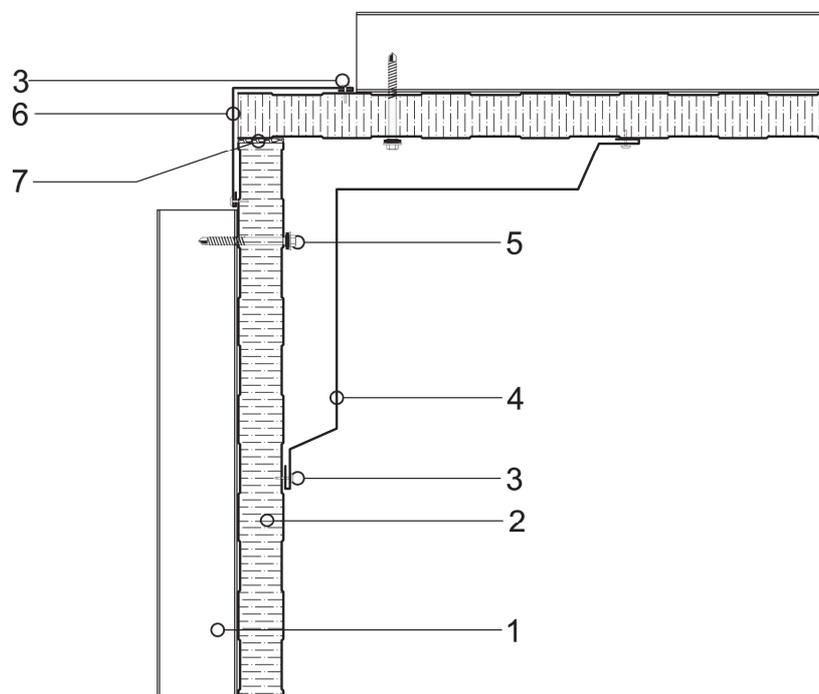


The designer is responsible for assessing the need to insert additional gasket and/or closing elements, even when not indicated in the drawing details.

Key


1	Steel structure
2	ISOPAN mineral wool wall panel
3	Rivet
4	External side corner connection metal sheet
5	Panel fastening screw
6	Internal side corner connection metal sheet
7	Polyurethane foam or mineral wool insulating material

ATTENTION: the proposed solution does not represent a project, and must be examined and assessed prior by the designer or Clerk of Works. The property rights of this document belong exclusively to ISOPAN S.p.a. Reproduction even in part without prior written authorisation by the author is forbidden. To choose the type of fastening, please refer to the screw type choice sheet; To choose the screw length, please refer to the data sheet for the correct screw length.

WALL CORNER CONNECTION

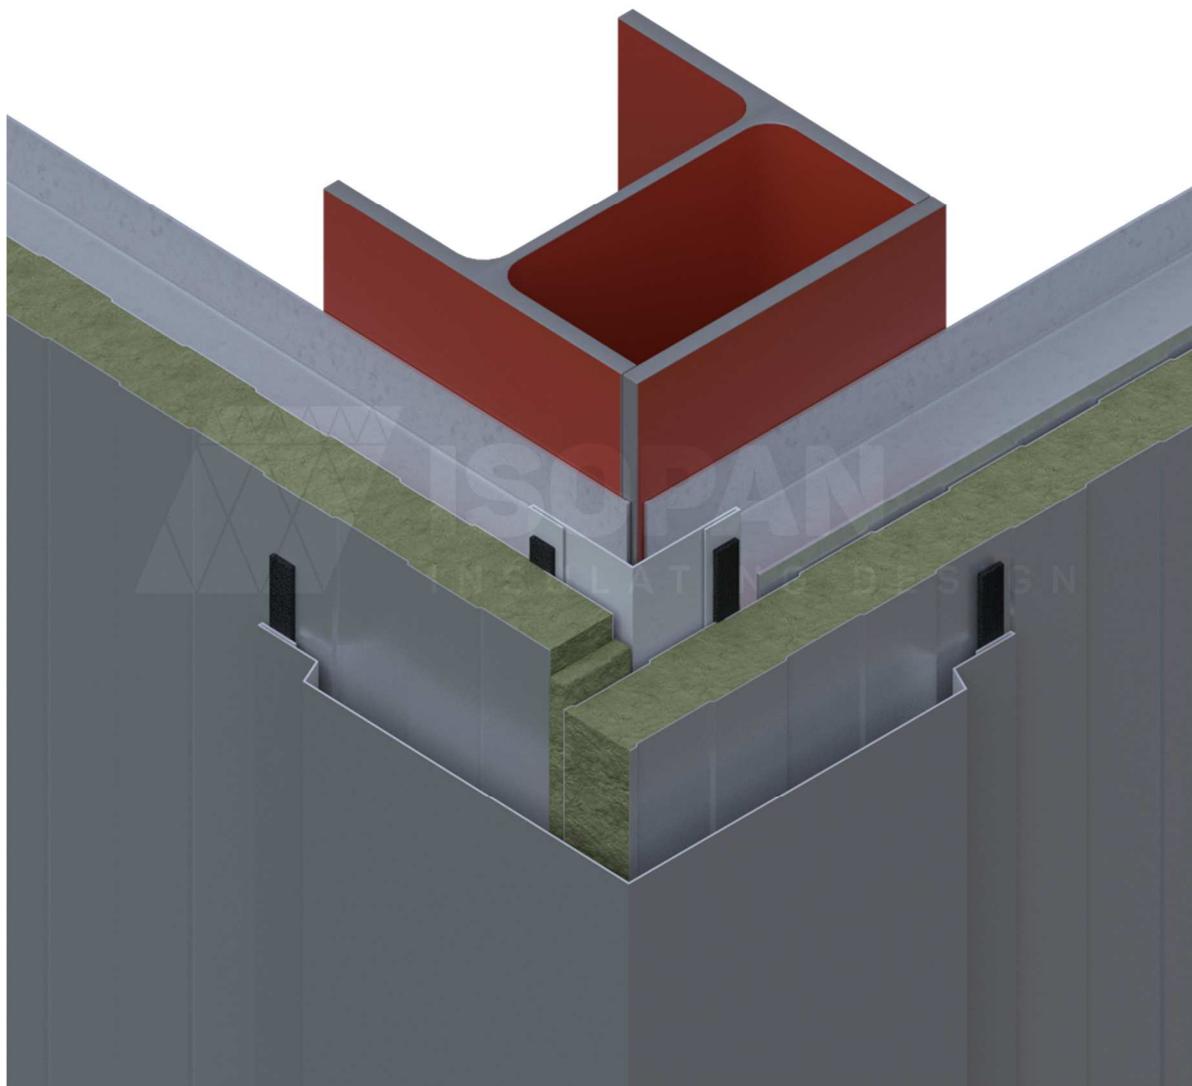

Type 5 wall angular connection: horizontal cross-section

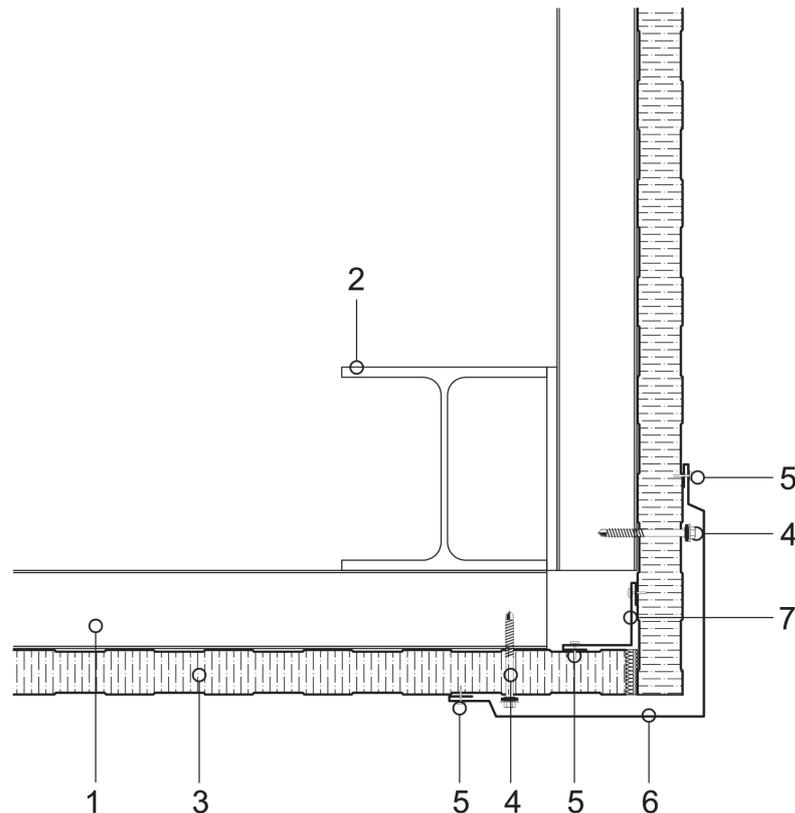


The designer is responsible for assessing the need to insert additional gasket and/or closing elements, even when not indicated in the drawing details.

Key


1	Steel structure
2	HEA profile
3	ISOPAN mineral wool wall panel
4	Panel fastening screw
5	Rivet
6	External side corner connection metal sheet
7	Internal side corner connection metal sheet

ATTENTION: the proposed solution does not represent a project, and must be examined and assessed prior by the designer or Clerk of Works. The property rights of this document belong exclusively to ISOPAN S.p.a. Reproduction even in part without prior written authorisation by the author is forbidden. To choose the type of fastening, please refer to the screw type choice sheet; To choose the screw length, please refer to the data sheet for the correct screw length.

ROOF WALL CONNECTION WITH INSULATED GUTTER

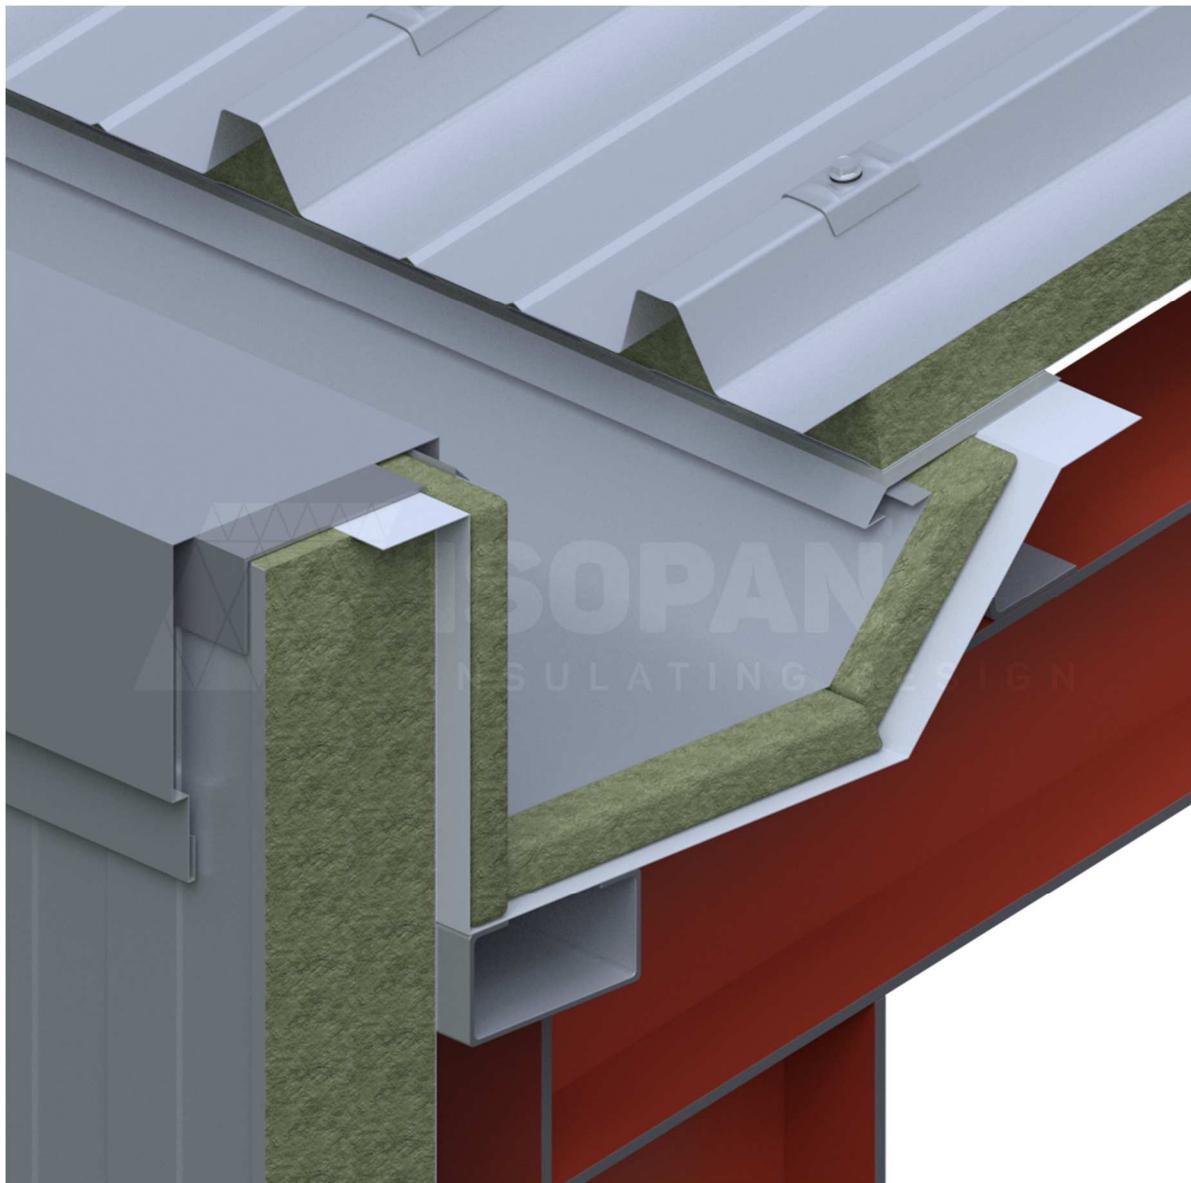

Roof wall connection with insulated gutter

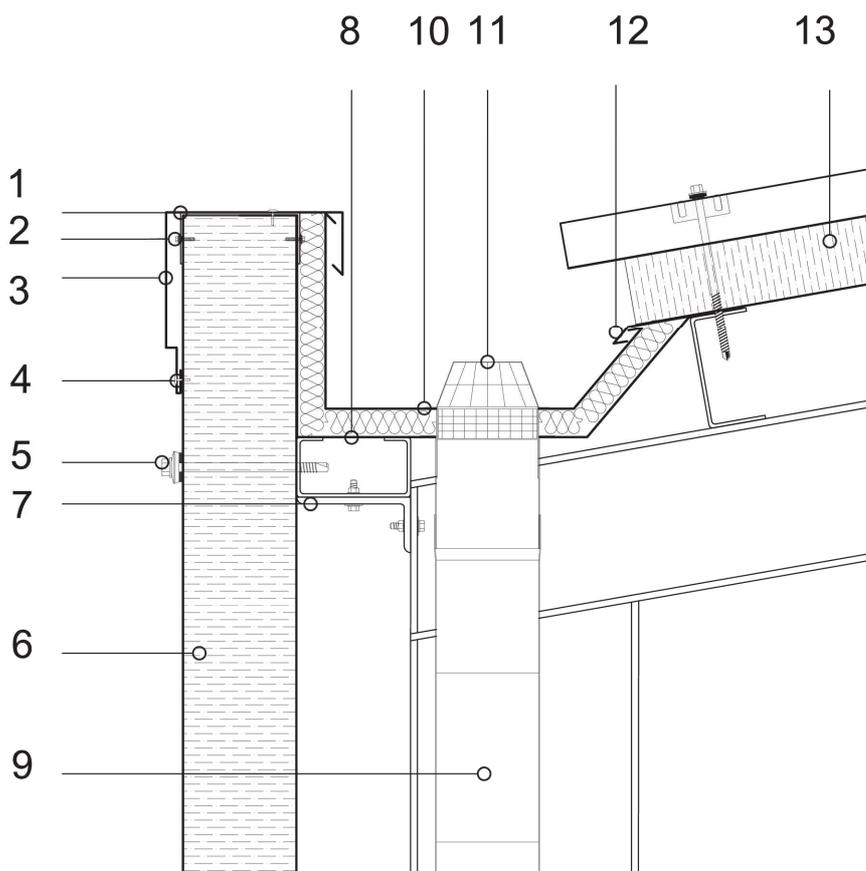


The designer is responsible for assessing the need to insert additional gasket and/or closing elements, even when not indicated in the drawing details.

Key


1	Head closing metal sheet	11	Leaf screen
2	Fastening screw	12	Drip edge metal sheet
3	Protective metal sheet	13	ISOPAN rock wool roof panel
4	Rivet		
5	Through fastening screw		
6	ISOPAN rock wool wall panel		
7	Steel load-bearing structure		
8	Eaves metal sheet		
9	Drainpipe		
10	Gutter		

ATTENTION: the proposed solution does not represent a project, and must be examined and assessed prior by the designer or Clerk of Works. The property rights of this document belong exclusively to ISOPAN S.p.a. Reproduction even in part without prior written authorisation by the author is forbidden. To choose the type of fastening, please refer to the screw type choice sheet; To choose the screw length, please refer to the data sheet for the correct screw length.

ROOF WALL CONNECTION WITH GUTTER

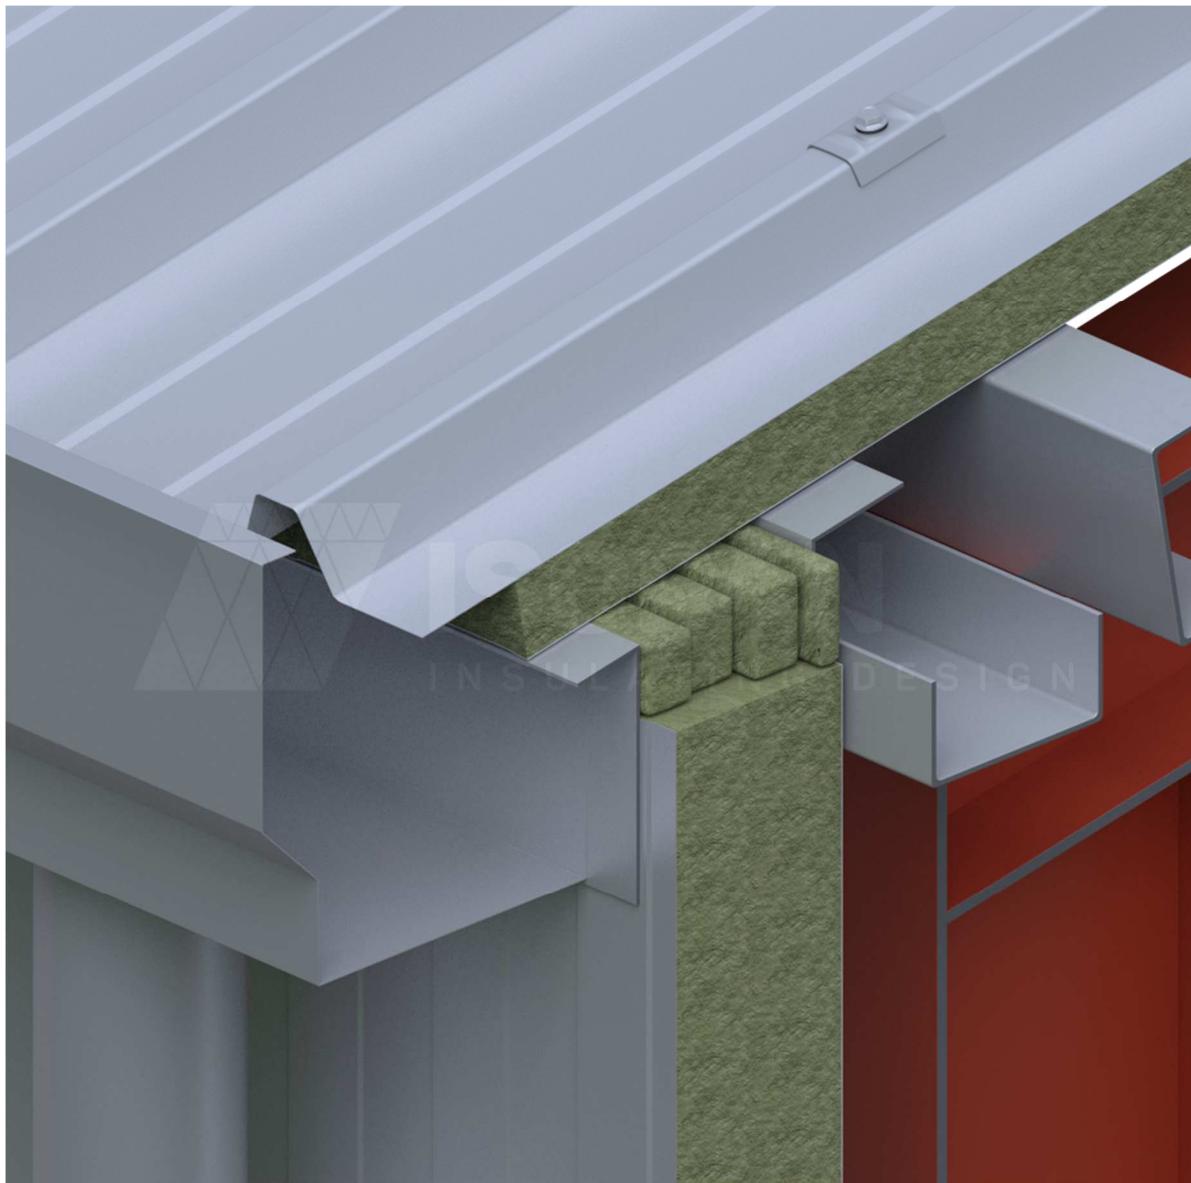

Type 1 roof wall connection with gutter

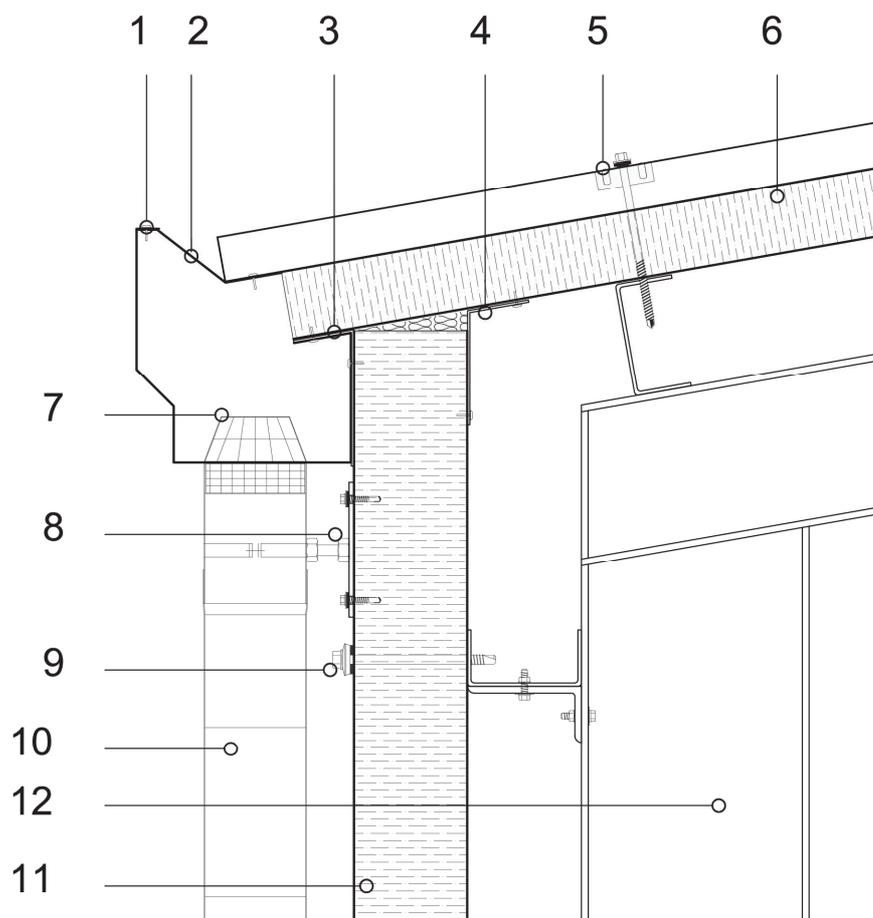


The designer is responsible for assessing the need to insert additional gasket and/or closing elements, even when not indicated in the drawing details.

Key

1	Rivet	11	ISOPAN mineral wool wall panel
2	Gutter support metal sheet	12	Main structure
3	External closing corner metal sheet		
4	Internal closing corner metal sheet		
5	Roof panel fastening unit		
6	ISOPAN mineral wool roof panel		
7	Leaf screen		
8	Gutter fastening unit		
9	Through fastening screw		
10	Gutter		

ATTENTION: the proposed solution does not represent a project, and must be examined and assessed prior by the designer or Clerk of Works. The property rights of this document belong exclusively to ISOPAN S.p.a. Reproduction even in part without prior written authorisation by the author is forbidden. To choose the type of fastening, please refer to the screw type choice sheet; To choose the screw length, please refer to the data sheet for the correct screw length.


ROOF WALL CONNECTION

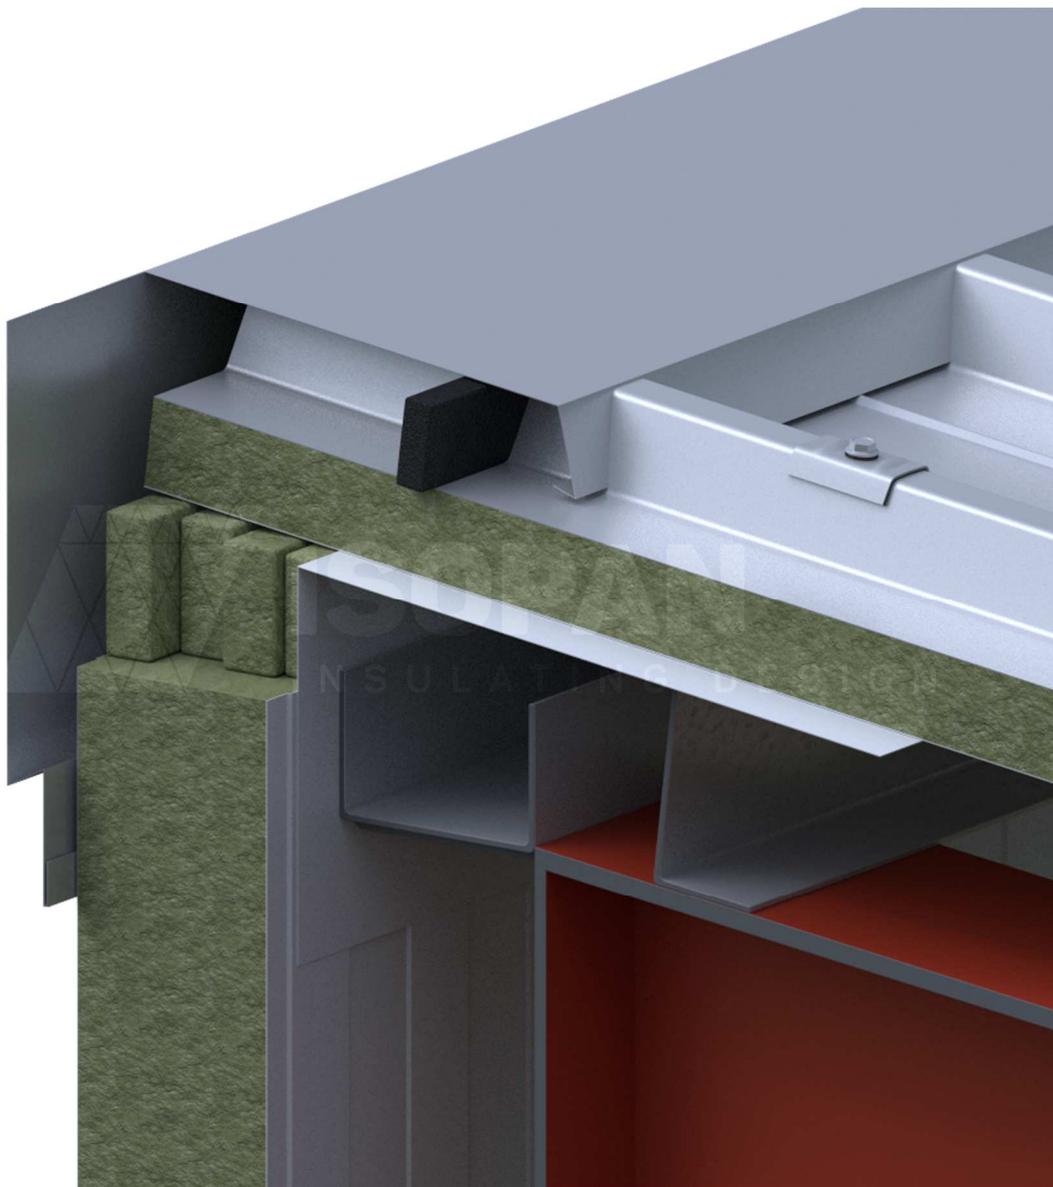

ISOPAN

RPCV 04fw

Type 1 roof wall connection

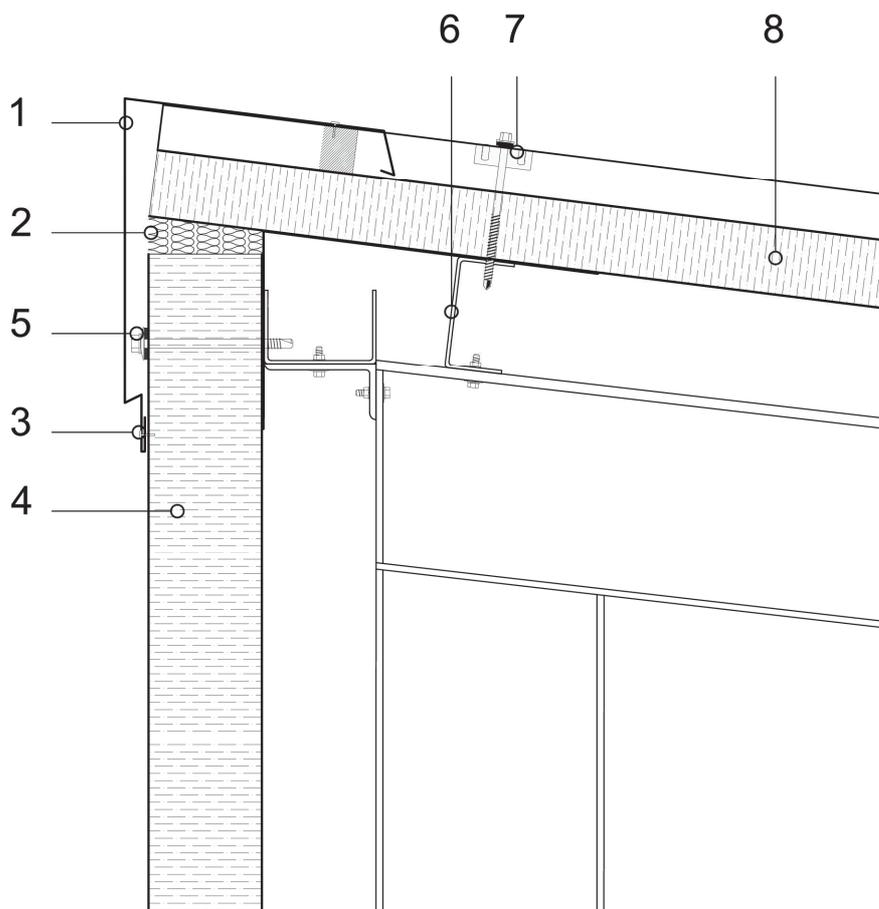


The designer is responsible for assessing the need to insert additional gasket and/or closing elements, even when not indicated in the drawing details.

Key

1	Closing metal sheet
2	Polyurethane foam insulating material
3	Rivet
4	ISOPAN mineral wool wall panel
5	Through fastening screw
6	Secondary steel structure
7	Roof - metal sheet through fastening screw
8	ISOPAN mineral wool roof panel

ATTENTION: the proposed solution does not represent a project, and must be examined and assessed prior by the designer or Clerk of Works. The property rights of this document belong exclusively to ISOPAN S.p.a. Reproduction even in part without prior written authorisation by the author is forbidden. To choose the type of fastening, please refer to the screw type choice sheet; To choose the screw length, please refer to the data sheet for the correct screw length.


FLAT ROOF WALL CONNECTION

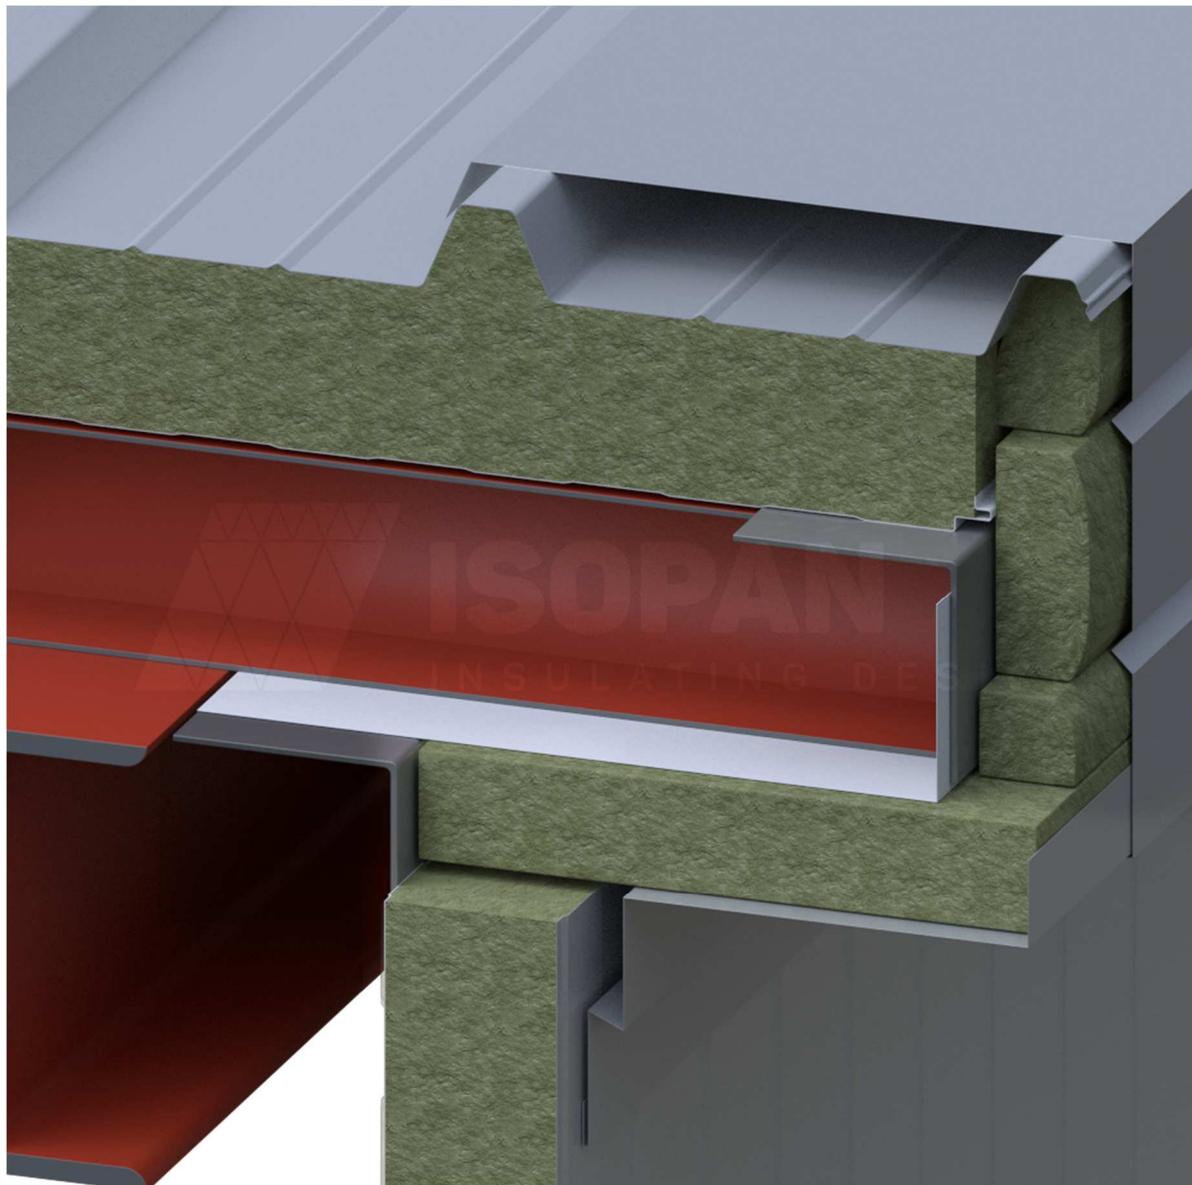

ISOPAN

RPCV 13fw

Roof wall side connection

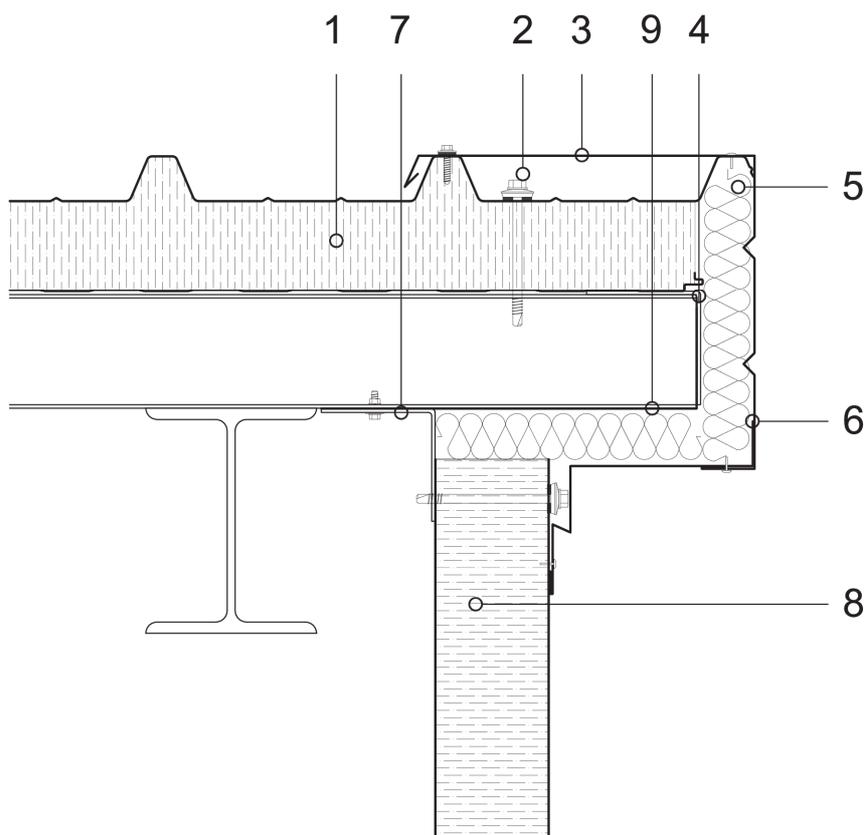


The designer is responsible for assessing the need to insert additional gasket and/or closing elements, even when not indicated in the drawing details.

Key


1	ISOPAN mineral wool roof panel
2	Roof panel fastening screw
3	Protective metal sheet
4	L-shaped closing metal sheet
5	Mineral wool insulating material
6	Protective metal sheet
7	Internal closing metal sheet
8	ISOPAN mineral wool wall panel
9	L-shaped closing metal sheet

ATTENTION: the proposed solution does not represent a project, and must be examined and assessed prior by the designer or Clerk of Works. The property rights of this document belong exclusively to ISOPAN S.p.a. Reproduction even in part without prior written authorisation by the author is forbidden. To choose the type of fastening, please refer to the screw type choice sheet; To choose the screw length, please refer to the data sheet for the correct screw length.

ROOF WALL CONNECTION WITH INSULATED GUTTER

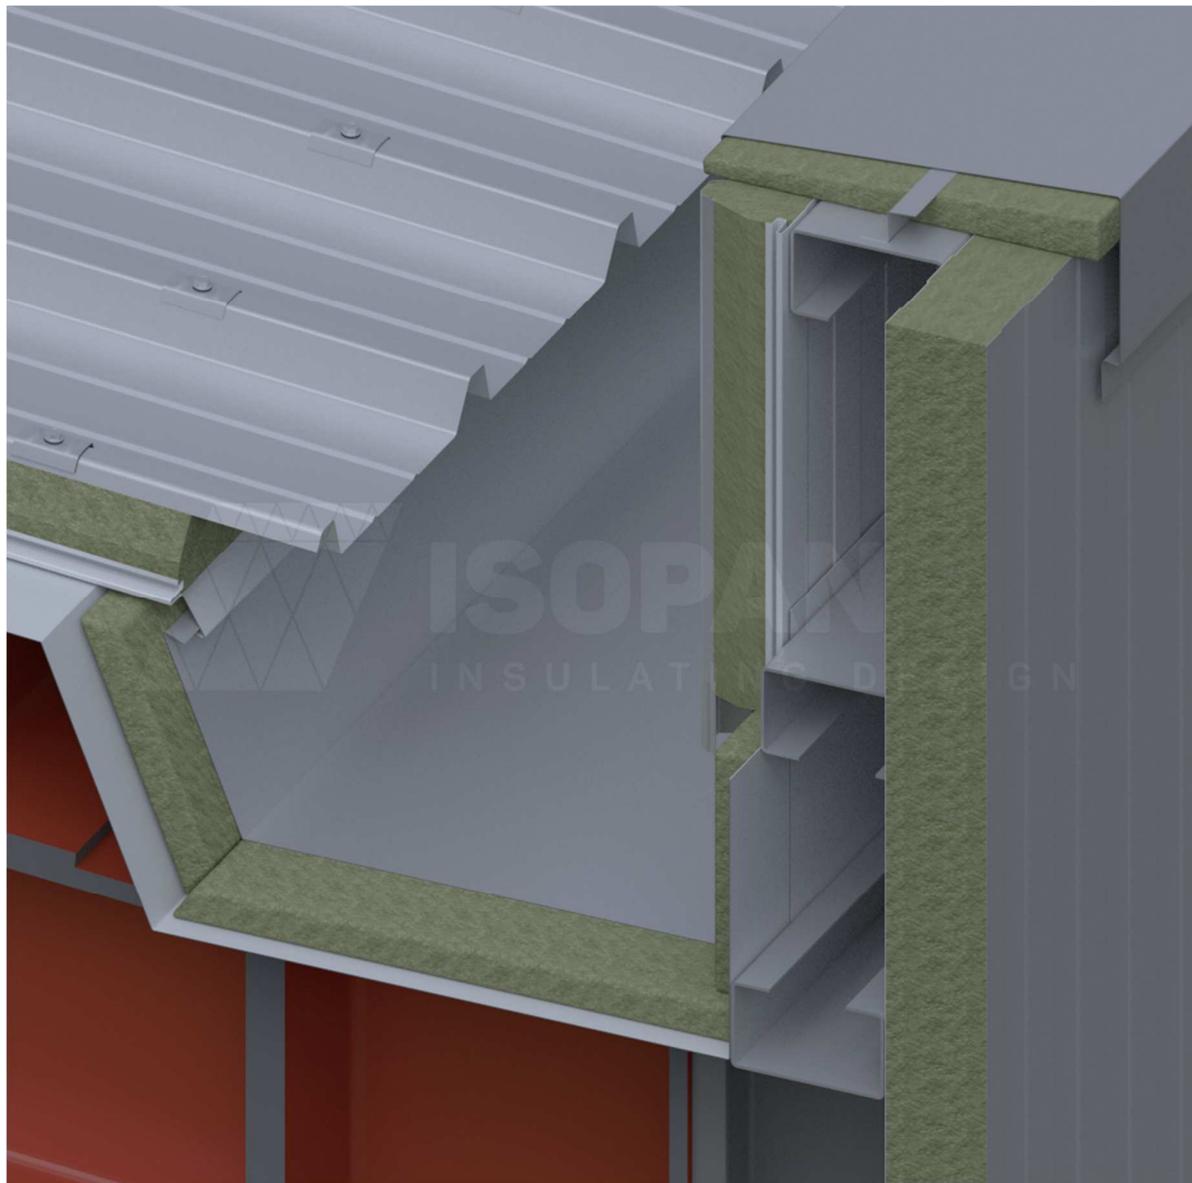

Type 4 roof wall connection with insulated gutter

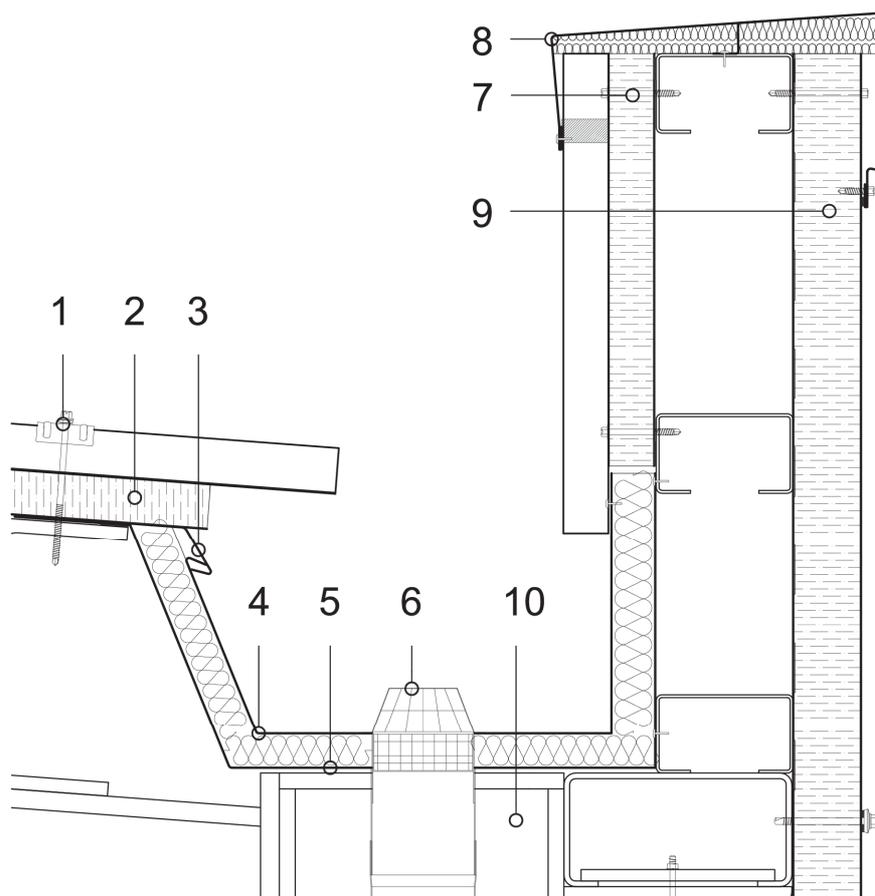


The designer is responsible for assessing the need to insert additional gasket and/or closing elements, even when not indicated in the drawing details.

Key


1	Roof panel fastening unit
2	ISOPAN mineral wool roof panel
3	Drip edge metal sheet
4	Gutter metal sheet
5	Eaves metal sheet
6	Leaf screen
7	Through fastening screw
8	Railing protection metal sheet
9	ISOPAN mineral wool wall panel
10	Main steel structure

ATTENTION: the proposed solution does not represent a project, and must be examined and assessed prior by the designer or Clerk of Works. The property rights of this document belong exclusively to ISOPAN S.p.a. Reproduction even in part without prior written authorisation by the author is forbidden. To choose the type of fastening, please refer to the screw type choice sheet; To choose the screw length, please refer to the data sheet for the correct screw length.

HORIZONTAL BUTT JOINT

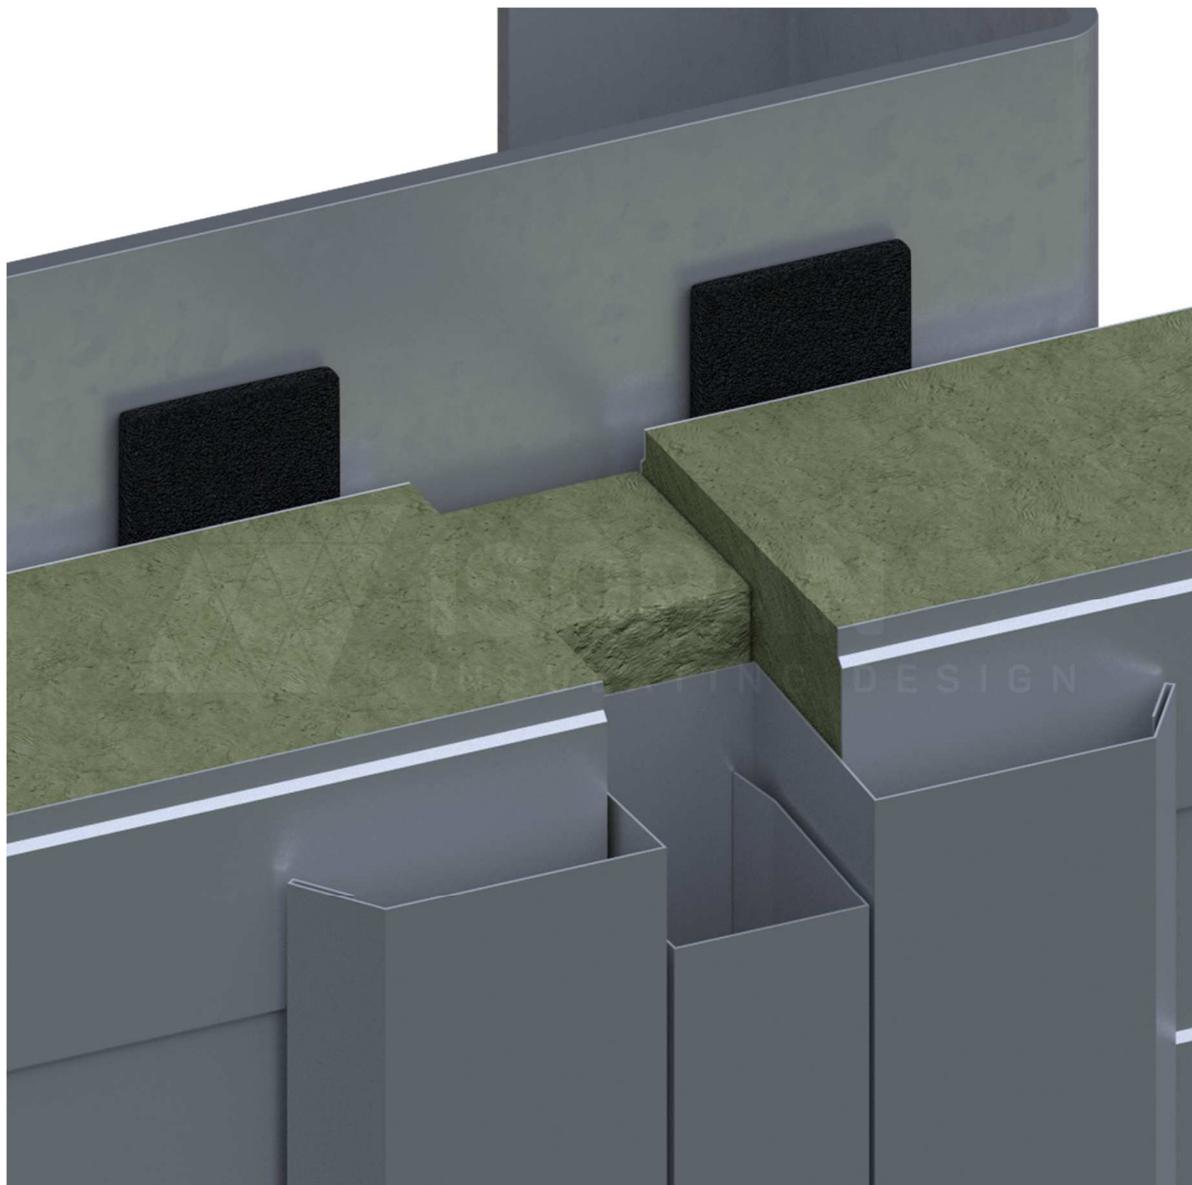

Type 3 horizontal joint between wall panels

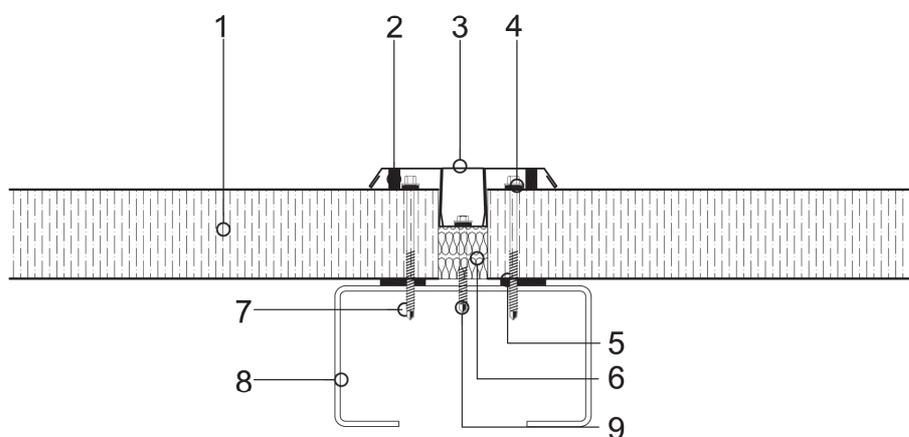


The designer is responsible for assessing the need to insert additional gasket and/or closing elements, even when not indicated in the drawing details.

Key


1	ISOPAN mineral wool wall panel
2	Joint connection metal sheet
3	Screw covering metal sheet
4	Rivet
5	EPDM rubber gasket
6	Mineral wool insulating material
7	Panel fastening screws
8	Steel face
9	Metal sheet fastening screw

ATTENTION: the proposed solution does not represent a project, and must be examined and assessed prior by the designer or Clerk of Works. The property rights of this document belong exclusively to ISOPAN S.p.a. Reproduction even in part without prior written authorisation by the author is forbidden. To choose the type of fastening, please refer to the screw type choice sheet; To choose the screw length, please refer to the data sheet for the correct screw length.

HORIZONTAL BUTT JOINT (FOR THERMAL EXPANSION)

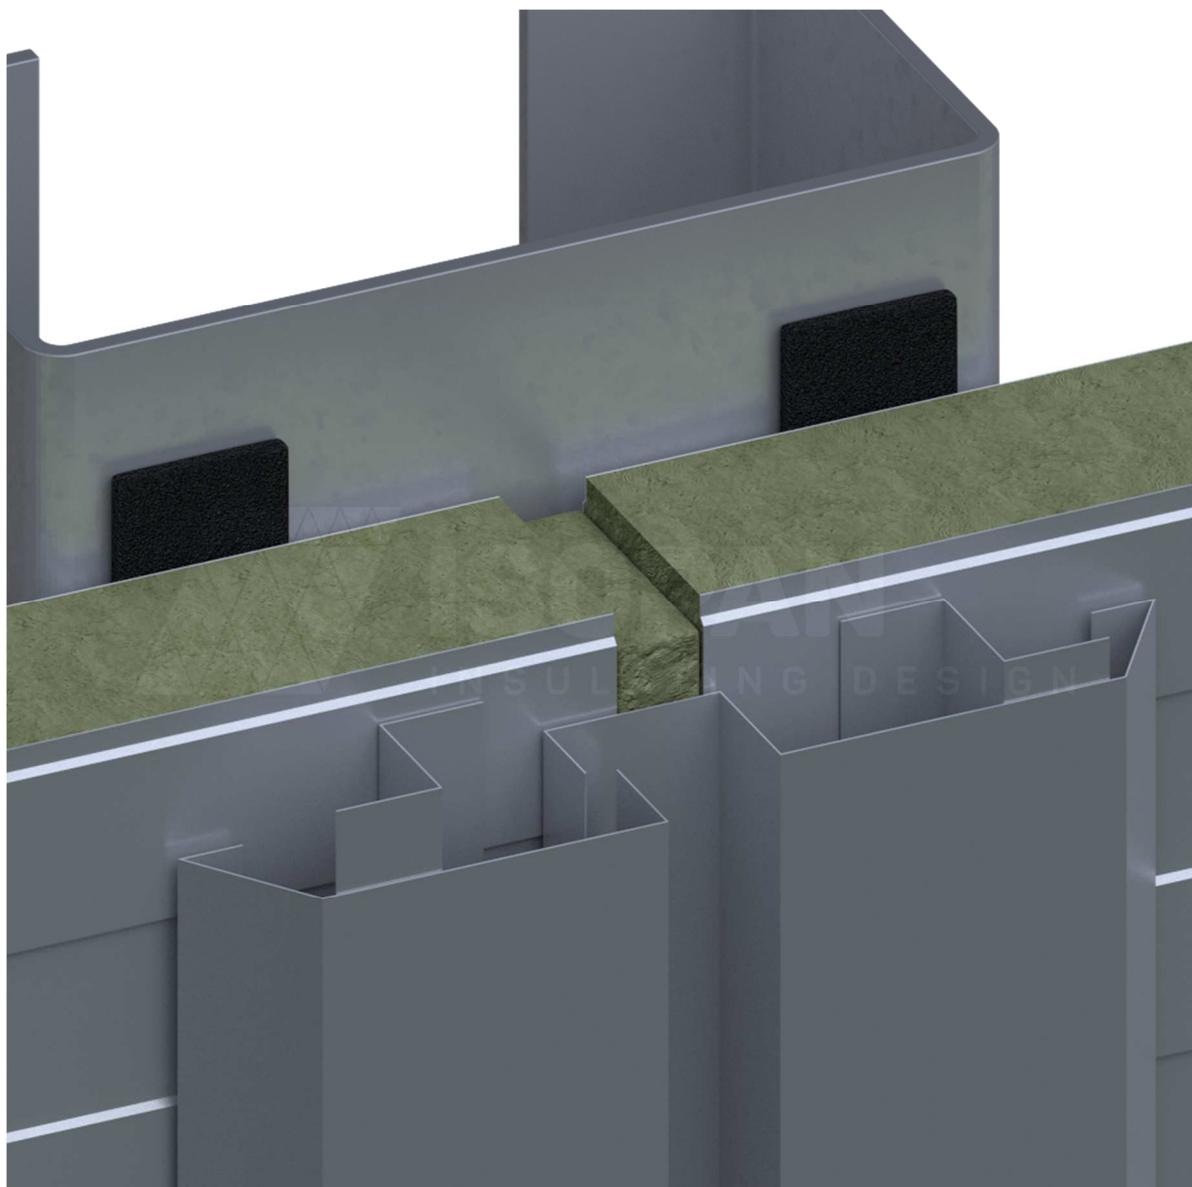

Type 5 horizontal joint between wall panels

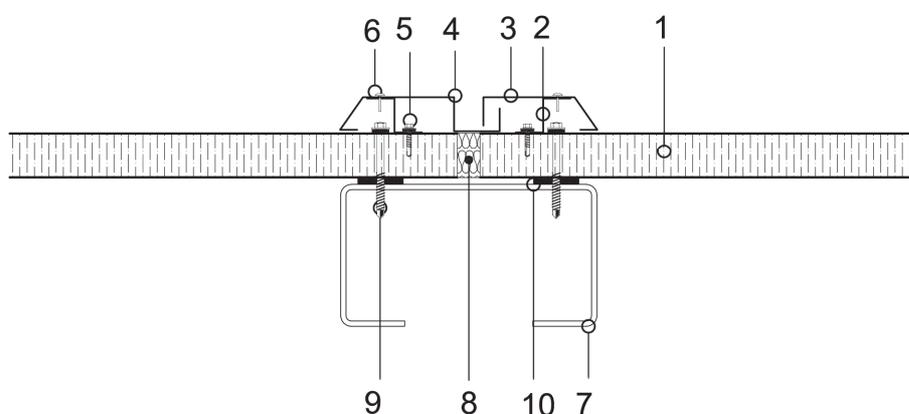


The designer is responsible for assessing the need to insert additional gasket and/or closing elements, even when not indicated in the drawing details.

Key


1	ISOPAN mineral wool wall panel
2	Support metal sheet
3	Joint connection metal sheet
4	Joint connection metal sheet
5	Metal sheet fastening screw
6	Rivet
7	Steel face
8	Mineral wool insulating material
9	Panel fastening screw
10	EPDM rubber gasket

ATTENTION: the proposed solution does not represent a project, and must be examined and assessed prior by the designer or Clerk of Works. The property rights of this document belong exclusively to ISOPAN S.p.a. Reproduction even in part without prior written authorisation by the author is forbidden. To choose the type of fastening, please refer to the screw type choice sheet; To choose the screw length, please refer to the data sheet for the correct screw length.

VERTICAL BUTT JOINT

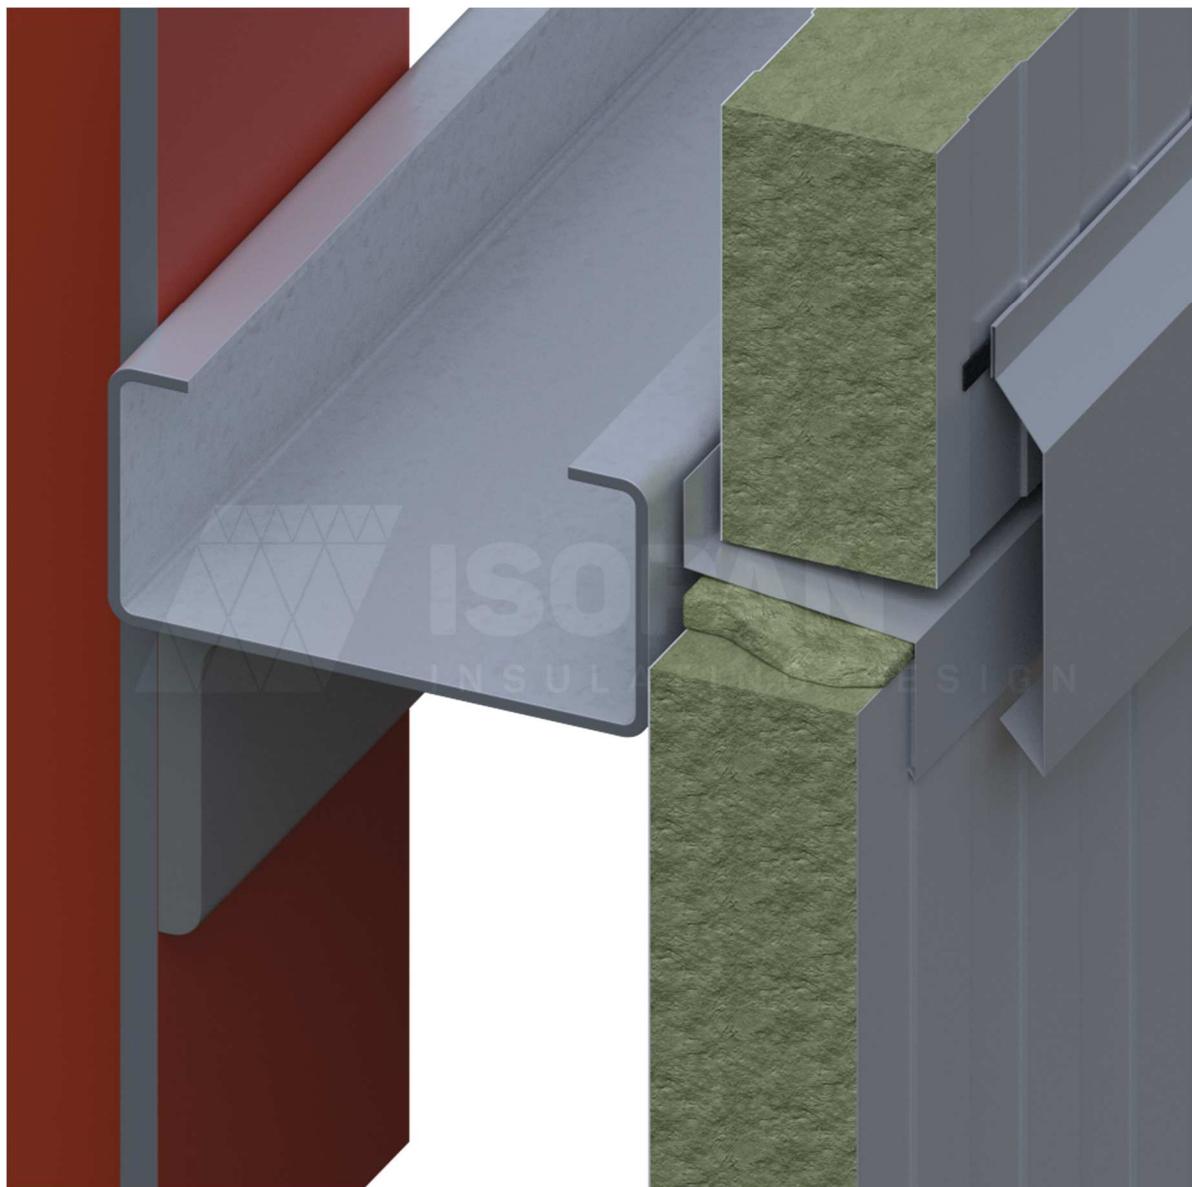

Type 6 steel structure panel hooking

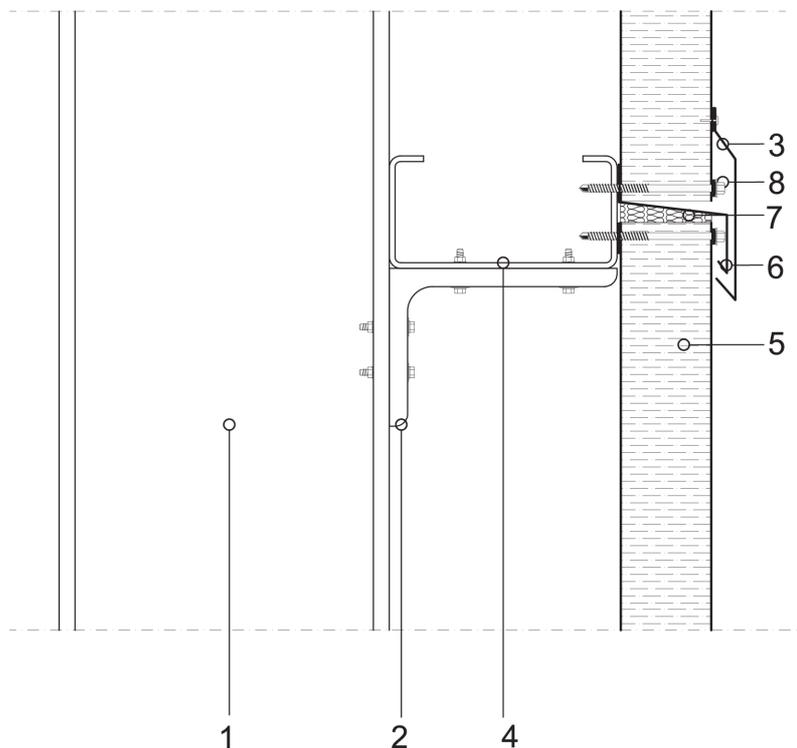

The designer is responsible for assessing the need to insert additional gasket and/or closing elements, even when not indicated in the drawing details.

Key


1	Steel load-bearing structure
2	L-shaped profile
3	Joint protection metal sheet
4	C-shaped press-formed profile
5	ISOPAN mineral wool wall panel
6	Drip edge metal sheet
7	Mineral wool insulating material
8	Panel fastening screw

ATTENTION: the proposed solution does not represent a project, and must be examined and assessed prior by the designer or Clerk of Works. The property rights of this document belong exclusively to ISOPAN S.p.a. Reproduction even in part without prior written authorisation by the author is forbidden. To choose the type of fastening, please refer to the screw type choice sheet; To choose the screw length, please refer to the data sheet for the correct screw length.

WALL PANEL FASTENING IN THE EVENT OF THERMAL EXPANSION



Wall panel fastening in the event of thermal expansion

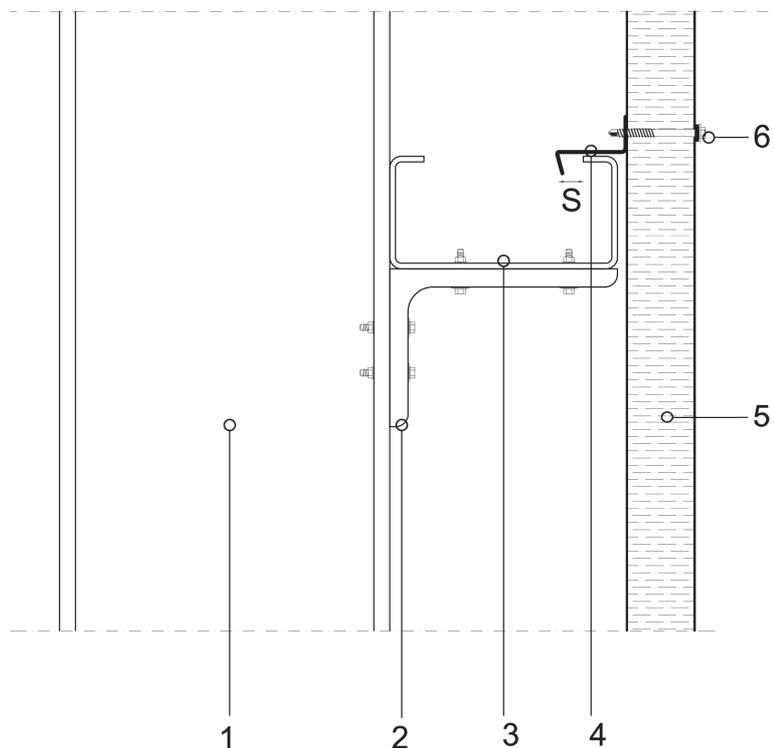


The designer is responsible for assessing the need to insert additional gasket and/or closing elements, even when not indicated in the drawing details.

Key


1	Steel load-bearing structure
2	L-shaped profile
3	Steel C-shaped profile for intermediate support
4	Block profile
5	ISOPAN mineral wool wall panel
6	Fastening screw
S	Compensation clearance for thermal expansion

ATTENTION: the proposed solution does not represent a project, and must be examined and assessed prior by the designer or Clerk of Works. The property rights of this document belong exclusively to ISOPAN S.p.a. Reproduction even in part without prior written authorisation by the author is forbidden. To choose the type of fastening, please refer to the screw type choice sheet; To choose the screw length, please refer to the data sheet for the correct screw length.

CONCRETE BASE KERB WALL PANEL CONNECTION

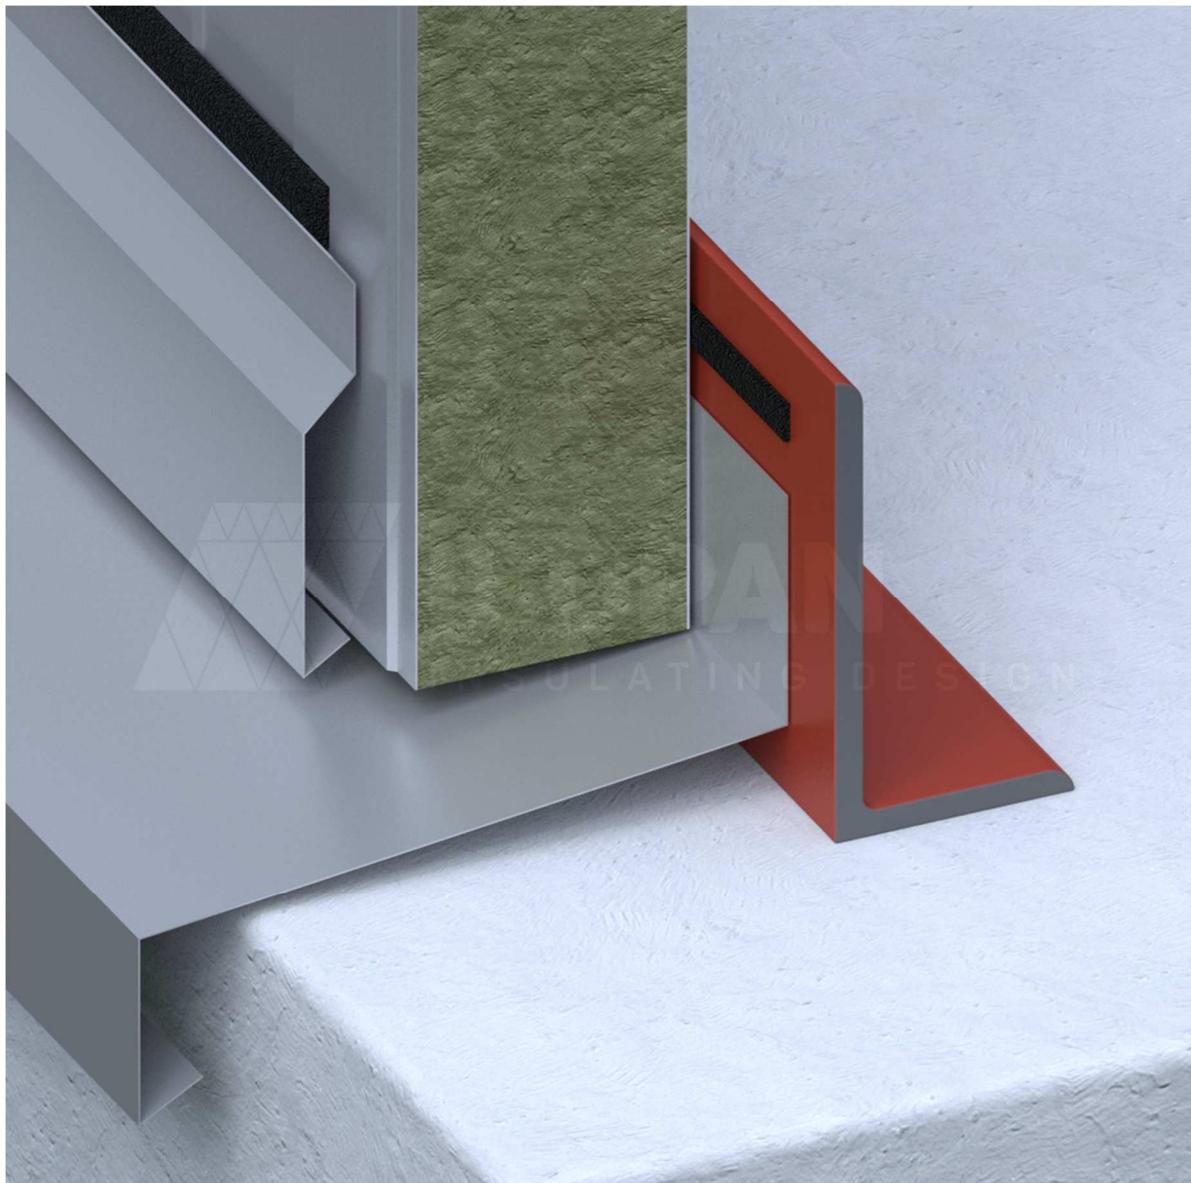

Type 7 wall panel hooking to concrete structure

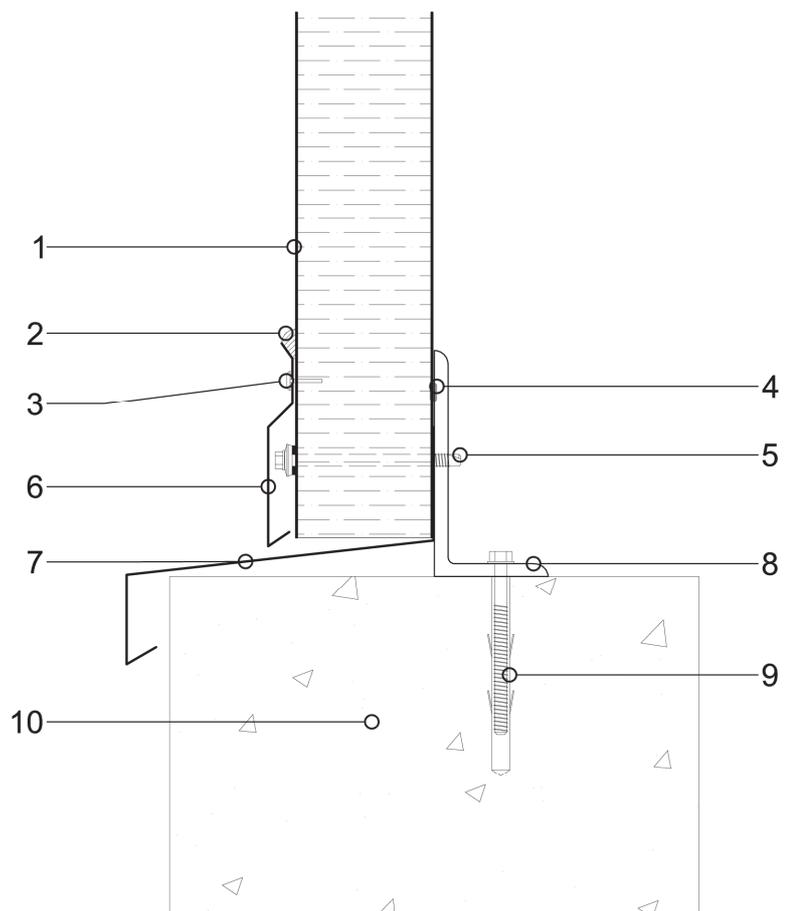

The designer is responsible for assessing the need to insert additional gasket and/or closing elements, even when not indicated in the drawing details.

Key

1	ISOPAN mineral wool wall panel
2	Silicone gasket
3	Rivet
4	Adhesive gasket
5	Panel fastening unit
6	Fastening protective tinwork
7	Drip edge tinwork
8	Steel standard L-shaped profile
9	Steel L-shaped face fastening screw
10	Concrete wall

ATTENTION: the proposed solution does not represent a project, and must be examined and assessed prior by the designer or Clerk of Works. The property rights of this document belong exclusively to ISOPAN S.p.a. Reproduction even in part without prior written authorisation by the author is forbidden. To choose the type of fastening, please refer to the screw type choice sheet; To choose the screw length, please refer to the data sheet for the correct screw length.



PART OF
MANNI
GROUP



ISOPAN

INSULATING DESIGN

www.isopan.com



Copyright © - ISOPAN S.p.A.

ITALY

REGISTERED AND ADMINISTRATIVE HQ

Via Augusto Righi 7 |
37135 Verona | Italy
T. +39 045 8088911

ISOPAN SPA

Verona | Italy
T. +39 045 7359111

Frosinone | Italy
T. +39 07752081

WORLD

ISOPAN IBERICA

Tarragona | Spain
T. +34 977 52 45 46

ISOPAN EST

Popești Leordeni | Romania
T. +40 21 3051600

ISOPAN DEUTSCHLAND GmbH

OT Plötz | Germany
T. +49 3460 33220

ISOPAN RUS

Volgogradskaya oblast' | Russia
T. +7 8443 21 20 30

ISOCINDU

Guanajuato | Mexico
+52 1472 800 7241

SALES OFFICES

ISOPAN FRANCE

Mérignac | France
T. +33 5 56021352

ISOPAN MANNI GROUP CZ

Praha | Czech Republic
contact@isopansendvicovepanely.cz